

HARDWARE REFERENCE MANUAL



“Clipper” Board

(Turbo PMAC2-Eth-Lite)

PRELIMINARY MANUAL

Turbo PMAC2-Eth-Lite Hardware Reference

4xx-603871-xAxx

March 23, 2007



DELTA TAU
Data Systems, Inc.

NEW IDEAS IN MOTION ...

Copyright Information

© 2007 Delta Tau Data Systems, Inc. All rights reserved.

This document is furnished for the customers of Delta Tau Data Systems, Inc. Other uses are unauthorized without written permission of Delta Tau Data Systems, Inc. Information contained in this manual may be updated from time-to-time due to product improvements, etc., and may not conform in every respect to former issues.

To report errors or inconsistencies, call or email:

Delta Tau Data Systems, Inc. Technical Support

Phone: (818) 717-5656

Fax: (818) 998-7807

Email: support@deltatau.com

Website: <http://www.deltatau.com>

Operating Conditions

All Delta Tau Data Systems, Inc. motion controller products, accessories, and amplifiers contain static sensitive components that can be damaged by incorrect handling. When installing or handling Delta Tau Data Systems, Inc. products, avoid contact with highly insulated materials. Only qualified personnel should be allowed to handle this equipment.

In the case of industrial applications, we expect our products to be protected from hazardous or conductive materials and/or environments that could cause harm to the controller by damaging components or causing electrical shorts. When our products are used in an industrial environment, install them into an industrial electrical cabinet or industrial PC to protect them from excessive or corrosive moisture, abnormal ambient temperatures, and conductive materials. If Delta Tau Data Systems, Inc. products are exposed to hazardous or conductive materials and/or environments, we cannot guarantee their operation.

REVISION HISTORY

REV.	DESCRIPTION	DATE	CHG	APPVD
1	NEW MANUAL CREATION	03/23/07	CP	S. MILICI

Table of Contents

INTRODUCTION	1
Board Configuration.....	1
<i>Base Version</i>	1
Board Options	2
<i>Option 5xF: CPU Speed Options</i>	2
<i>Option 10: Firmware Version Specification</i>	2
<i>Option 12: Analog-to-Digital Converters</i>	2
Additional Accessories.....	2
<i>Acc-1P: Axis Expansion Piggyback Board</i>	2
<i>Acc-8TS Connections Board</i>	2
<i>Acc-8ES Four-Channel Dual-DAC Analog Stack Board</i>	3
<i>Acc-8FS Four-Channel Direct PWM Stack Breakout Board</i>	3
<i>Acc-51S Four-Channel High Resolution Interpolator Board</i>	3
HARDWARE SETUP	5
Configuration Jumpers	5
MACHINE CONNECTIONS.....	6
Mounting.....	6
Power Supplies.....	6
<i>Digital Power Supply</i>	6
<i>DAC Outputs Power Supply</i>	6
<i>Flags Power Supply</i>	6
Overtravel Limits and Home Switches.....	6
<i>Types of Overtravel Limits</i>	6
<i>Home Switches</i>	7
Motor Signals Connections	7
<i>Incremental Encoder Connection</i>	7
<i>DAC Output Signals</i>	7
<i>Pulse and Direction (Stepper) Drivers</i>	8
<i>Amplifier Enable Signal (AENAn/DIRn)</i>	8
<i>Amplifier Fault Signal (FAULT-)</i>	8
Optional Analog Inputs	8
Compare Equal Outputs	9
Serial Port (JRS232 Port).....	9
Machine Connections Example: Using Analog $\pm 10V$ Amplifier	10
Machine Connections Example: Using Pulse and Direction Drivers	11
SOFTWARE SETUP	12
PMAC I-Variables.....	12
Communications.....	12
<i>Operational Frequency and Baud Rate Setup</i>	12
Filtered DAC Output Configuration.....	12
<i>Parameters to Set up Global Hardware Signals</i>	13
<i>Parameters to Set Up Per-Channel Hardware Signals</i>	14
<i>Effects of Changing I7000 on the System</i>	14
<i>How changing I7000 affects other settings in PMAC</i>	16
<i>Effects of Output Resolution and Servo Interrupt Frequency on Servo Gains</i>	17
Using Flag I/O as General-Purpose I/O.....	18
Analog Inputs Setup	18
<i>CPU Analog Inputs</i>	18
General-Purpose Digital Inputs and Outputs.....	18
Thumbwheel Port Digital Inputs and Outputs.....	19
HARDWARE REFERENCE SUMMARY	20

Board Dimensions and Layout	21
Connectors and Indicators	22
<i>J2 - Serial Port (JRS232 Port)</i>	22
<i>J3 - Machine Connector (JMACH1 Port)</i>	22
<i>J4 - Machine Connector (JMACH2 Port)</i>	22
<i>J7 - Machine Connector (JMACH3 Port)</i>	22
<i>J8 - Thumbwheel Multiplexer Port (JTHW Port)</i>	22
<i>J9 - General-Purpose Digital Inputs and Outputs (JOPT Port)</i>	22
<i>J10 – Handwheel and Pulse/Dir Connector (JHW/PD Port)</i>	23
<i>J12 – Ethernet Communications Port</i>	23
<i>TB1 – Power Supply Terminal Block (JPWR Connector)</i>	23
<i>LED Indicators</i>	23
E-POINT JUMPER DESCRIPTIONS	25
E0: Forced Reset Control	25
E1 – E2: Serial Port Selection	25
E3: Normal/Re-Initializing Power-Up/Reset.....	25
E4: Watchdog Disable Jumper	25
E5: Ethernet Port CPU Write Control Jumper.....	26
E6: ADC Inputs Enable.....	26
E10 – E12: Power-Up State Jumpers	26
E13: Power-Up/Reset Load Source.....	26
E14- E17: Ports Direction Control	27
CONNECTOR PINOUTS.....	28
J2 (JRS232) Serial Port Connector.....	28
J3 (JMACH1): Machine Port Connector.....	29
J3 JMACH1 (50-Pin Header).....	30
J4 (JMACH2): Machine Port CPU Connector	31
J7 (JMACH3): Machine Port	32
J8 (JTHW): Multiplexer Port Connector.....	33
J9 (JOPT): I/O Port Connector.....	34
J10 (JHW) Handwheel Encoder Connector.....	35
J12 Ethernet Port (Optional).....	36
TB1 (JPWR): Power Supply	36
SCHEMATICS	38

INTRODUCTION



The Turbo PMAC2-Eth-Lite controller (“Clipper”) from Delta Tau provides a very powerful, but compact and cost-effective, multi-axis controller for cost-sensitive applications. It has a full Turbo PMAC2 CPU section and provides a minimum of 4 axes of servo or stepper control with 32 general-purpose digital I/O points. It provides both Ethernet and RS-232 communications links.

The optional axis expansion board provides a set of four additional servo channels and extra I/O ports.

Board Configuration

Base Version

The base version of the Turbo PMAC2-Eth-Lite Controller order with no options provides a 110mm x 220mm (4.25” x 8.5”) board with:

- 80 MHz DSP56303 Turbo PMAC CPU
- 256k x 24 user SRAM
- 1M x 8 flash memory for user backup & firmware
- Latest released firmware version
- RS-232 serial interface
- 100 Mbps Ethernet interface
- 4 channels axis-interface circuitry, each including:
 - 12-bit $\pm 10V$ analog output
 - Pulse-&-direction digital outputs
 - 3-channel differential/single-ended encoder input
 - 5 input flags, 2 output flags
 - UVW TTL-level “hall” inputs
- 50-pin IDC header for amplifier/encoder interface
- 34-pin IDC header for flag interface
- 4-pin Molex connector for power supply input (5V, +/-12V, GND) (+/-12V only required for analog outputs or inputs)
- PID/notch/feedforward servo algorithms
- 32 general-purpose TTL-level I/O points, direction selectable by byte:
 - 16-point multiplexer port compatible with Delta Tau I/O accessories
 - 16-point “opto” port compatible with Opto-22-style modules
- “Handwheel” port with 2 each:
 - Quadrature encoder inputs
 - Pulse (PFM or PWM) output pairs

On-board options:

- Optional 2 channels 12-bit A/D converters, 1 12-bit D/A converter
- Optional Modbus Ethernet I/O protocol

Stackable accessories supported:

- ACC-1P PC/104-format Channel 5-8 board
- ACC-8ES 4-channel dual 18-bit true-DAC output board
- ACC-8FS 4-channel direct-PWM output board
- ACC-8TS 4-channel ADC-interface board
- ACC-51S 2/4-channel high-resolution encoder interpolator board

- 4-axis 3-phase direct-PWM amplifier board (48V, 5A cont./10A peak, in design)

Board Options

Option 5xF: CPU Speed Options

- Option 5CF: 80 MHz DSP563xx CPU (160 MHz 56002 equivalent)
- Option 5EF: 160 MHz DSP563xx CPU (320 MHz 56002 equivalent)

Option 10: Firmware Version Specification

Normally the Turbo PMAC2-Eth-Lite Controller is provided with the newest released firmware version. A label on the memory IC shows the firmware version loaded at the factory. Option 10 provides for a user-specified firmware version.

Option 12: Analog-to-Digital Converters

Option 12 permits the installation of two channels of on-board analog-to-digital converters with $\pm 10V$ input range and 12-bits resolution. This option also provides one filtered PWM DAC output.

Additional Accessories

Acc-1P: Axis Expansion Piggyback Board

Acc-1P provides four additional channels axis interface circuitry for a total of eight servo channels, each including:

- 12-bit $\pm 10V$ analog output
- Pulse-and-direction digital outputs
- 3-channel differential/single-ended encoder input
- Four input flags, two output flags
- Three PWM top-and-bottom pairs (unbuffered)

Acc-1P Option 1: I/O Ports

Option 1 provides the following ports on the Acc-1P axes expansion board for digital I/O connections.

- Multiplexer Port: This connector provides eight input lines and eight output lines at TTL levels. When using the PMAC Acc-34x type boards these lines allow multiplexing large numbers of inputs and outputs on the port. Up to 32 of the multiplexed I/O boards may be daisy-chained on the port, in any combination.
- I/O Port: This port provides eight general-purpose digital inputs and eight general-purpose digital outputs at 5 to 24Vdc levels. This 34-pin connector was designed for easy interface to OPTO-22 or equivalent optically isolated I/O modules when different voltage levels or opto-isolation to the PMAC2A PC/104 is necessary.
- Handwheel port: this port provides two extra channels, each jumper selectable between encoder input or pulse output.

Acc-1P Option 2: Analog-to-Digital Converters

Option 2 permits the installation on the Acc-1P of two channels of analog-to-digital converters with $\pm 10V$ input range and 12-bits resolution.

Acc-8TS Connections Board

Acc-8TS is a stack interface board to for the connection of either one or two Acc-28B A/D converter boards. When a digital amplifier with current feedback is used, the analog inputs provided by the Acc-28B cannot be used.

Acc-8ES Four-Channel Dual-DAC Analog Stack Board

Acc-8ES provides four channels of 18-bit dual-DAC with four DB-9 connectors. This accessory is stacked to the Clipper Board and it is mostly used with amplifiers that require two ± 10 V command signals for sinusoidal commutation.

Acc-8FS Four-Channel Direct PWM Stack Breakout Board

Acc-8FS it is a 4-channel direct PWM stack breakout board for Clipper Board. This is used for controlling digital amplifiers that require direct PWM control signals. When a digital amplifier with current feedback is used, the analog inputs provided by the Option 12 of the Clipper Board (the Option 2 of the Acc-1P or the Acc-28B) could not be used.

Acc-51S Four-Channel High Resolution Interpolator Board

The ACC-51S Interpolator Accessory is a sine wave input interpolator designed to interface analog quadrature encoders to the Clipper Board. The ACC-51S stacks on top of the Clipper Board or on top of the ACC-1P 5-8 axis board. The Interpolator accepts inputs from two (optionally four) sinusoidal or quasi-sinusoidal encoders and provides encoder position data to the PMAC. This interpolator creates 4,096 steps per sine-wave cycle.

HARDWARE SETUP

On the Clipper Board, there are a number of jumpers called E-points or W-points that customize the hardware features of the CPU for a given application and must be setup appropriately. The following is an overview grouped in appropriate categories. For an itemized description of the jumper setup configuration, refer to the E-Point Descriptions section.

Configuration Jumpers

E0: Forced Reset Control Jumper – Remove E0 for normal operation. Installing E0 forces PMAC to a reset state, this configuration is for factory use only; the board will not operate with E0 installed.

E1 and E2: Serial Port Selection Jumper – These jumpers select the target CPU for the serial port as either the main PMAC CPU or the Ethernet CPU (change IP address). Both jumpers must be set the same.

- 1-2 for Main CPU
- 2-3 for Ethernet CPU

E3: Re-Initialization on Reset Control Jumper – If E3 is OFF (default), PMAC executes a normal reset, loading active memory from the last saved configuration in non-volatile flash memory. If E3 is ON, PMAC re-initializes on reset, loading active memory with the factory default values.

E4: Watchdog Timer Disable Jumper – Jumper E4 must be OFF for the watchdog timer to operate. This is a very important safety feature, so it is vital that this jumper be OFF for normal operation. E4 should only be put ON to debug problems with the watchdog timer circuit.

E5: Ethernet Port CPU Write Control Jumper – Jump pins 1 to 2 to write protect Ethernet CPU Jump pin 2 to 3 to enable programming of the Ethernet CPU..

E6: ADC Enable Jumper – Install E16 to enable the analog-to-digital converter circuitry ordered through Option-12. Remove this jumper to disable this option, which might be necessary to control motor 1 through a digital amplifier with current feedback.

E10-E12: Power-Up State Jumpers – Jumper E10 must be OFF, jumper E11 must be ON, and jumper E12 must be ON, in order for the CPU to copy the firmware from flash memory into active RAM on power-up/reset. This is necessary for normal operation of the card. (Other settings are for factory use only.)

E13: Firmware Load Jumper – If jumper E13 is ON during power-up/reset, the board comes up in bootstrap mode which permits loading of firmware into the flash-memory IC. When the PMAC Executive program tries to establish communications with a board in this mode, it will detect automatically that the board is in bootstrap mode and ask what file to download as the new firmware. Jumper E13 must be OFF during power-up/reset for the board to come up in normal operational mode.

E14-E17: Ports Direction Control Jumpers – These jumpers select the I/O lines direction of the JTHW and the JOPT connectors. This allows configuring these ports as all inputs, all outputs or half inputs and half outputs according to the following tables:

JTHW Connector			
E14	E15	DATx lines	SELx lines
OFF	OFF	Output	Output
OFF	ON	Output	Input
ON	OFF	Input	Output
ON	ON	Input	Input

JOPT Connector			
E16	E17	MOx lines	MIx Lines
OFF	OFF	Output	Output
OFF	ON	Output	Input
ON	OFF	Input	Output
ON	ON	Input	Input

If E14 is removed or E15 is installed then the multiplexing feature if the JTHW port cannot be used.

MACHINE CONNECTIONS

Typically, the user connections are made to terminal blocks that attach to the JMACH connectors by a flat cable. The following are the terminal blocks recommended for connections:

- 34-Pin IDC header to terminal block breakouts (Phoenix part number 2281063) Delta Tau part number 100-FLKM34-000
- 50-Pin IDC header to terminal block breakouts (Phoenix part number 2281089) Delta Tau part number 100-FLKM50-000

Mounting

The Clipper Board is typically installed as a stand-alone controller using standoffs. At each of the four corners of the board and at the center edges, there are mounting holes that can be used for this.

The order of the Acc-1P or other stacked accessories with respect to the Clipper Board does not matter.

Power Supplies

Digital Power Supply

3A @ +5V ($\pm 5\%$) (15 W) with a minimum 5 msec rise time

(Eight-channel configuration, with a typical load of encoders)

The Clipper Board and other stackable accessories each require a 1A @ 5VDC power supply for operation. Therefore, a 3A @ 5VDC power supply is recommended for a Clipper Board with two stacked accessories. The +5V lines from the supply, including the ground reference, can be brought in either from the TB1 terminal block or from the JMACH1 connector.

DAC Outputs Power Supply

0.3A @ +12 to +15V (4.5W)

0.25A @ -12 to -15V (3.8W)

(Eight-channel configuration)

The ± 12 V lines from the supply, including the ground reference, can be brought in either from the TB1 terminal block or from the JMACH1 connector.

Flags Power Supply


Each channel of PMAC has five dedicated digital inputs on the machine connector: PLIMn, MLIMn (overtravel limits), HOMEn (home flag), FAULTn (amplifier fault), and USERn. A power supply from 5 to 24V must be used to power the circuits related to these inputs. This power supply can be the same used to power PMAC and can be connected from the TB1 terminal block or the JMACH1 connector.

Overtravel Limits and Home Switches

When assigned for the dedicated uses, these signals provide important safety and accuracy functions. PLIMn and MLIMn are direction-sensitive over-travel limits that must conduct current to permit motion in that direction. If no over-travel switches will be connected to a particular motor, this feature must be disabled in the software setup through the PMAC Ixx24 variable.

Types of Overtravel Limits

PMAC expects a closed-to-ground connection for the limits to not be considered on fault. This arrangement provides a failsafe condition. Usually, a passive normally close switch is used. If a proximity switch is needed instead, use a 5 to 24V normally closed to ground NPN sinking type sensor.

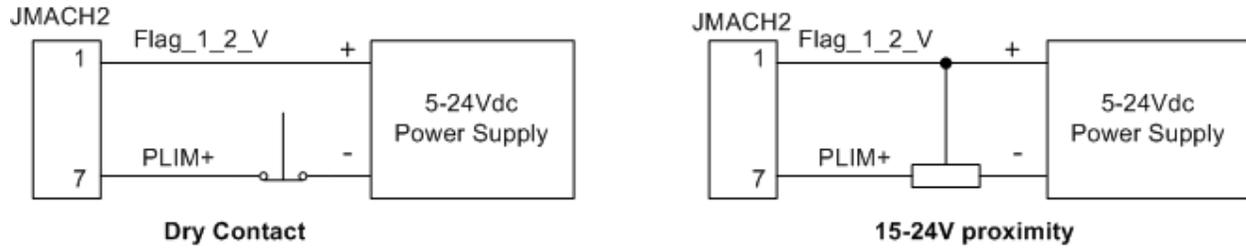

Home Switches


While normally closed-to-ground switches are required for the overtravel limits inputs, the home switches could be either normally close or normally open types. The polarity is determined by the home sequence setup, through the I-variables I9n2.

Motor Signals Connections

Incremental Encoder Connection

Each JMACH1 connector provides two +5V outputs and two logic grounds for powering encoders and other devices. The +5V outputs are on pins 1 and 2; the grounds are on pins 3 and 4. The encoder signal pins are grouped by number: all those numbered 1 (CHA1+, CHA1-, CHB1+, CHC1+, etc.) belong to encoder #1. The encoder number does not have to match the motor number, but usually does. Connect the A and B (quadrature) encoder channels to the appropriate terminal block pins. For encoder 1, the CHA1+ is pin 5 and CHB1+ is pin 9. If there is a single-ended signal, leave the complementary signal pins floating – do not ground them. However, if single-ended encoders are used, check the setting of the resistor packs (see the Hardware Setup section for details). For a differential encoder, connect the complementary signal lines – CHA1- is pin 7, and CHB1- is pin 11. The third channel (index pulse) is optional; for encoder 1, CHC1+ is pin 13, and CHC1- is pin 15.

Example: differential quadrature encoder connected to channel #1:

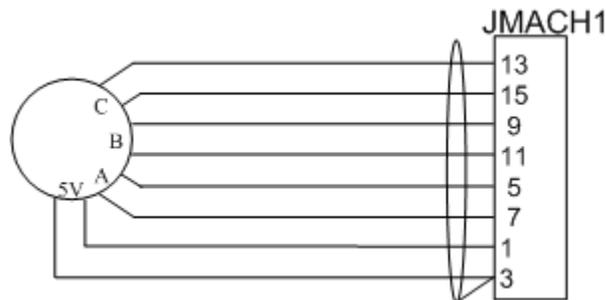

DAC Output Signals


If PMAC is not performing the commutation for the motor, only one analog output channel is required to command the motor. This output channel can be either single-ended or differential, depending on what the amplifier is expecting. For a single-ended command using PMAC channel 1, connect DAC1+ (pin 29) to the command input on the amplifier. Connect the amplifier's command signal return line to PMAC's GND line (pin 48). In this setup, leave the DAC1- pin floating; do not ground it.

For a differential command using PMAC channel 1, connect DAC1 (pin 29) to the plus-command input on the amplifier. Connect DAC1- (pin 31) to the minus-command input on the amplifier. PMAC's GND should still be connected to the amplifier common.

Any analog output not used for dedicated servo purposes may be utilized as a general-purpose analog output by defining an M-variable to the command register, then writing values to the M-variable. The analog outputs are intended to drive high-impedance inputs with no significant current draw (10mA


max). The 220Ω output resistors will keep the current draw lower than 50 mA in all cases and prevent damage to the output circuitry, but any current draw above 10 mA can result in noticeable signal distortion.

Example:

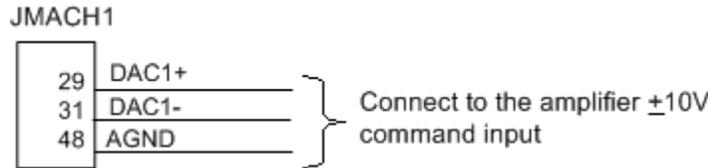


Pulse and Direction (Stepper) Drivers

The channels provided by the Clipper Board or the Acc-1P board can output pulse and direction signals for controlling stepper drivers or hybrid amplifiers. These signals are at TTL levels.

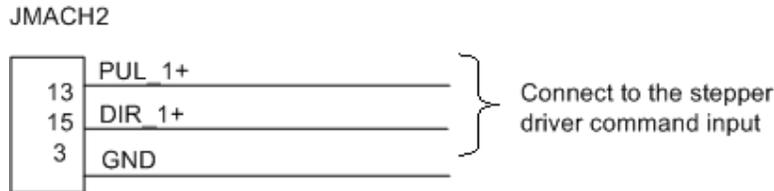


Amplifier Enable Signal (AENAn/DIRn)

Most amplifiers have an enable/disable input that permits complete shutdown of the amplifier regardless of the voltage of the command signal. PMAC’s AENA line is meant for this purpose. AENA1- is pin 33. This signal is an open-collector output and an external 3.3 kΩ pull-up resistor can be used if necessary.

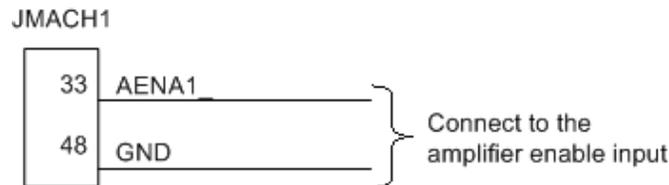


Amplifier Fault Signal (FAULT-)

This input can take a signal from the amplifier so PMAC knows when the amplifier is having problems, and can shut down action. The polarity is programmable with I-variable Ixx24 (I124 for motor 1) and the return signal is ground (GND). FAULT1- is pin 35. With the default setup, this signal must actively be pulled low for a fault condition. In this setup, if nothing is wired into this input, PMAC will consider the motor not to be in a fault condition.

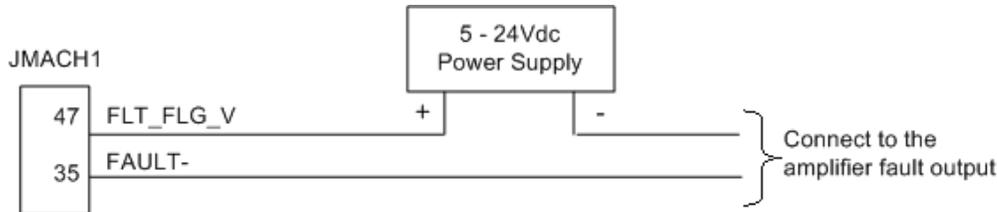


Optional Analog Inputs

The optional analog-to-digital converter inputs are ordered either through Option-12 on the CPU or Option-2 on the axis expansion board. Each option provides two 12-bit analog inputs analog inputs with a ±10Vdc range, and one 12-bit filtered PWM DAC output.

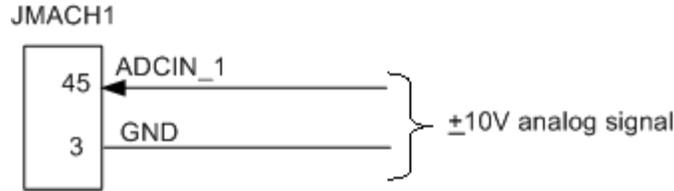

Compare Equal Outputs


The compare-equals (EQU) outputs have a dedicated use of providing a signal edge when an encoder position reaches a pre-loaded value. This is very useful for scanning and measurement applications. Instructions for use of these outputs are covered in detail in the PMAC2 User Manual.

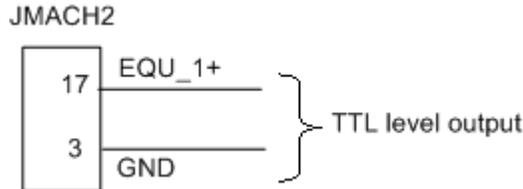

Serial Port (JRS232 Port)


For serial communications, use a serial cable to connect your PC's COM port to the J2 serial port connector present on the Clipper Board. Delta Tau provides the Acc-3L cable for this purpose that connects the PMAC to a DB-9 connector. Standard DB-9-to-DB-25 or DB-25-to-DB-9 adapters may be needed for your particular setup.

If a cable needs to be made, the easiest approach is to use a flat cable prepared with flat-cable type connectors as indicated in the following diagram:

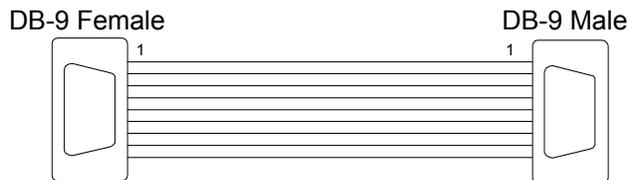


PMAC (DB-9S)	PC (DB-9)
1 (No connect)	1 (No connect)
2 (TXD/)	2 (RXD)
3 (RXD/)	3 (TXD)
4 (DSR)	4 (DTR)
5 (Gnd)	5 (Gnd)
6 (DTR)	6 (DSR)
7 (CTS)	7 (RTS)
8 (RTS)	8 (CTS)
9 (No connect)	9 (No connect)

Machine Connections Example: Using Analog $\pm 10V$ Amplifier

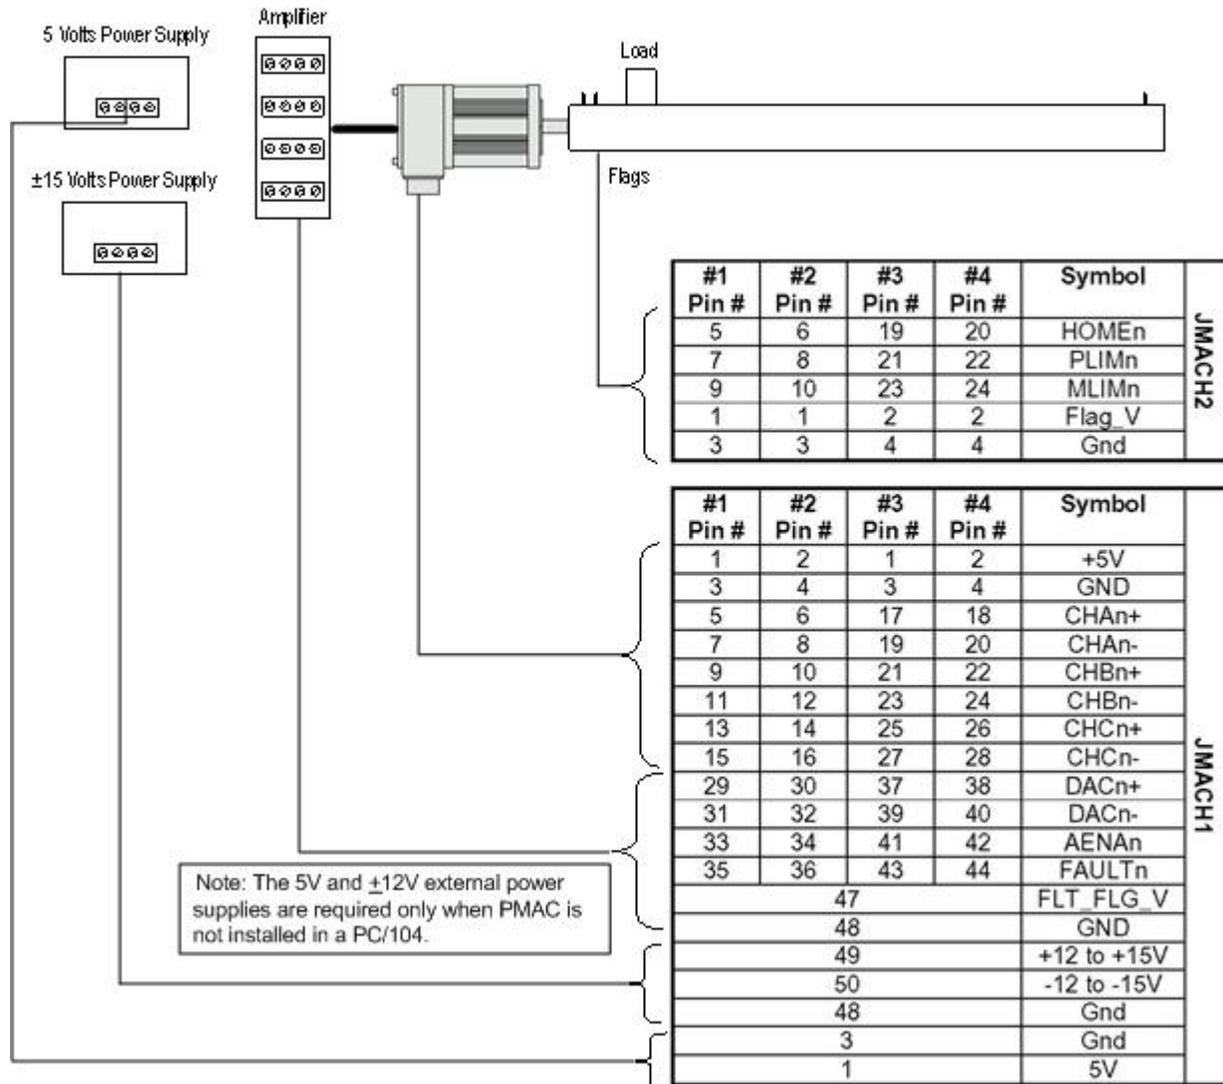

Machine Connections Example: Using Pulse and Direction Drivers

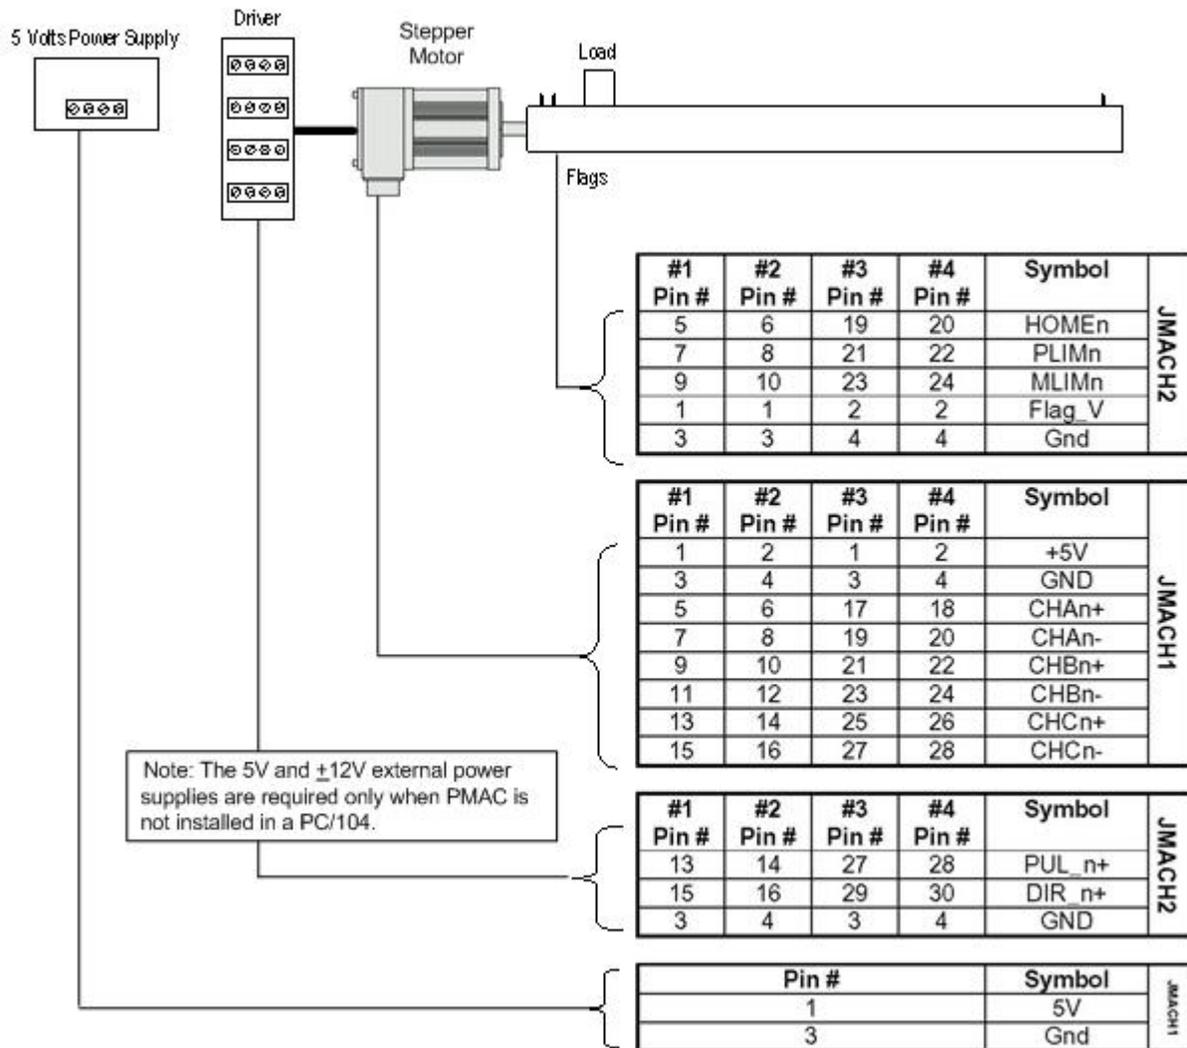

SOFTWARE SETUP

PMAC I-Variables

PMAC has a large set of Initialization parameters (I-variables) that determine the "personality" of the card for a specific application. Many of these are used to configure a motor properly. Once set up, these variables may be stored in non-volatile EAROM memory (using the **SAVE** command) so the card is always configured properly (PMAC loads the EAROM I-variable values into RAM on power-up).

The programming features and configuration variables for the Clipper Board are described fully in the Turbo PMAC User and Software manuals.

Communications

Delta Tau provides software tools that allow communicating with of the Clipper Board by either its standard RS-232 port or Ethernet ports. The PEWIN32 Pro2 Executive is the most important in the series of software accessories, and it allows configuring and programming the PMAC for any particular application.

Operational Frequency and Baud Rate Setup

I52 controls the operational clock frequency of the Turbo PMAC's CPU by controlling the multiplication factor of the phase-locked loop (PLL) inside the CPU. The PLL circuit multiplies the input 10 MHz (actually 9.83 MHz) clock frequency by a factor of (I52 + 1) to create the clock frequency for the CPU. Formally, this is expressed in the equation:

$$\text{CPU Frequency (MHz)} = 10 * (\text{I52} + 1)$$

I52 should usually be set to create the highest CPU frequency for which the CPU is rated. For the standard 80 MHz CPU, it should be set to 7.

Note:

It may be possible to operate a CPU at a frequency higher than its rated frequency, particularly at low ambient temperatures. However, safe operation cannot be guaranteed under these conditions, and any such operation is done entirely at the user's own risk.

I52 is actually used at power-on/reset only, so to make a change in the CPU frequency with I52, change the value of I52, store this new value to non-volatile flash memory with the SAVE command, and reset the card with the \$\$\$ command.

If too high a value of I52 has been set, the watchdog timer on the PMAC will likely trip immediately after reset due to CPU operational failure. If this happens, the PMAC must be reinitialized using E3.

Filtered DAC Output Configuration

The Clipper Board +/-10V DAC outputs is produced by filtering a PWM signal. Although this technique does not contain the same levels of performance as a true Digital to Analog converter, for most servo applications it is more than adequate. This section is meant for explaining the tradeoffs of PWM frequency vs. resolution in the Clipper Board configuration as well as a comparison to the true 18 bit DACs.

Both the resolution and the frequency of the Filtered PWM outputs are configured in software on the Clipper Board through the variable **I7000**. This variable also effects the phase and servo interrupts. Therefore as we change **I7000** we will also have to change **I7001** (phase clock divider), **I7002** (servo

clock divider), and **I10** (servo interrupt time). These four variables are all related and must be understood before adjusting parameters.

Since the Clipper Board uses standard Turbo PMAC2 firmware the following I-variables must be set properly to use the digital-to-analog (filtered DAC) outputs:

```
I7000 = 1001 ; PWM frequency 29.4kHz, PWM 1-4
I7001 = 5 ; Phase Clock 9.8kHz
I7002 = 3 ; Servo frequency 2.45kHz
I7003 = 1746 ; ADC frequency
I7100 = 1001 ; PWM frequency 29.4kHz, PWM 5-8
I7103 = 1746 ; ADC frequency
I70n6 = 0 ; Output mode: PWM
Ixx69 = 1001 ; DAC limit 10Vdc
I10 = 3421867 ; Servo interrupt time
```

n = channel number from 1 to 8

xx = motor number from 1 to 8

Parameters to Set up Global Hardware Signals

I7000

I7000 determines the frequency of the **MaxPhase** clock signal from which the actual phase clock signal is derived. It also determines the PWM cycle frequency for Channels 1 to 4. This variable is set according to the equation:

$$I7000 = \text{INT}[117,964.8 / (4 * \text{PWMPFreq}(\text{KHz})) - 1]$$

The Clipper Board filtered PWM circuits were optimized for about 30KHz. The minimum frequency **I7000** should be set to is 1088 (calculated as 27.06856KHz)

I7001

I7001 determines how the actual phase clock is generated from the **MaxPhase** clock, using the equation:

$$\text{PhaseFreq}(\text{kHz}) = \text{MaxPhaseFreq}(\text{kHz}) / (I7001+1)$$

I7001 is an integer value with a range of 0 to 15, permitting a division range of 1 to 16. Typically, the phase clock frequency is in the range of 8 kHz to 12 kHz. About 9 KHz is standard, set **I7001** = 5.

I7002

I7002 determines how the servo clock is generated from the phase clock, using the equation:

$$\text{ServoFreq}(\text{KHz}) = \text{PhaseFreq}(\text{KHz}) / (I7002+1)$$

I7002 is an integer value with a range of 0 to 15, permitting a division range of 1 to 16. On the servo update, which occurs once per servo clock cycle, PMAC updates commanded position (interpolates) and closes the position/velocity servo loop for all active motors, whether or not commutation and/or a digital current loop is closed. Typical servo clock frequencies are 1 to 4 kHz. The PMAC standard is about 2 KHz, set **I902** = 3.

I10 tells the Clipper Board interpolation routines how much time there is between servo clock cycles. It must be changed any time **I7000**, **I7001**, or **I7002** is changed. **I10** can be set according to the formula:

$$I10 = (2 * I7000 + 3) (I7001 + 1) (I7002 + 1) * 640 / 9$$

I10 should be set to 3421867.

I7003

I7003 determines the frequency of four hardware clock signals used for machine interface channels 1-4; This can be left at the default value (I7003=*) unless the on board Option-12 ADCs are used. The four hardware clock signals are SCLK (encoder sample clock), PFM_CLK (pulse frequency modulator clock), DAC_CLK (digital-to-analog converter clock), and ADC_CLK (analog-to-digital converter clock).

Parameters to Set Up Per-Channel Hardware Signals

I70n6

I70n6 is the output mode; “n” is the output channel number (i.e. for channel 1 the variable to set would be I7016, I7026 for channel 2 etc.). On Pmac1 there is only one output and one output mode: DAC output. On PMAC2 boards, each channel has 3 outputs, and there are 4 output modes. Since this board was designed to output filtered PWM signals, we want to configure at least the first output as PWM. Therefore the default value of 0 is the choice. For information on this variable consult the Turbo Software Reference Manual.

Ixx69

Ixx69 is the motor output command limit. The analog outputs on PMAC1 style boards and some PMAC2 accessories are 16-bit or 18-bit DACs, which map a numerical range of -32,768 to +32,767 into a voltage range of -10V to +10V relative to analog ground (AGND). For our purposes of a filtered PWM output this value still represents the maximum voltage output; however the ratio is slightly different. With a true DAC, Ixx69=32767 allows a maximum voltage of 10V output. With the filtered PWM circuit, Ixx69 is a function of I7000. A 10V signal in the output register is no longer 32767 as was in PMAC1, a 10V signal is corresponds to a value equal to I7000. Anything over I7000 will just rail the DAC at 10V. For Example:

Desired Maximum Output Value = 6V

$$I_{xx69} = 6/10 * I7000$$

Desired Maximum Output Value = 10V

$$I_{xx69} = I7000 + 10 \quad ; \text{ add a little headroom to assure a full } 10V$$

Effects of Changing I7000 on the System

It should now be understood that a full 10 volts is output when the output register is equal to I7000. The output register is suggested m-variable Mxx02 (I.e. M102->Y:\$078002,8,16,S ; OUT1A command value; DAC or PWM). With default setting of I7000, 10Volts is output when M102 is equal to I7000, or 1001. Since the output register is an integer value the smallest increment of change is about 10mV (1/1001 * 10V). Some users may want to calibrate their analog output using Ixx29. Ixx29 is an integer similar to Mxx02 except the value is added to the output register every servo cycle to apply a digital offset to the output register. Therefore the resolution of our output signal affects how Ixx29 should be set. As mentioned earlier, with the default parameters, 1 bit change in the output register changes the analog output by about 10mV. Therefore if there is an analog output offset less than 5mV, Ixx29 cannot decrease your offset. By increasing I7000 you increase your resolution, so if you double I7000, 1 bit change in the output register corresponds to about 5mV. So with Ixx29 you can only change the offset in increments of 5mV.

You can see above that by increasing I7000 you increase the resolution of our command output register. While this does offer some advantages, users should carefully consider the tradeoffs when changing I7000 between resolution and ripple.

By increasing I7000 we are essentially decreasing our PWM Frequency. The two are related by the following equation:

$$I7000 = \text{INT}[117,964.8 / (4 * \text{PWMPFreq(KHz)}) - 1]$$

Passing the PWM signal through a 10KHz low pass filter creates the +/-10V signal output. The duty cycle of the PWM signal is what generates the magnitude the voltage output. The frequency of the PWM signal determines the magnitude and frequency of ripple on that +/-10V signal. As you lower the PWM frequency and subsequently increase your output resolution, you increase the magnitude of the ripple as well as slow down the frequency of the ripple as well. Depending on the system, this ripple can affect performance at different levels.

So what do we mean by ripple? Ripple is the small signal that will you will see on top of the +/-10V signal if you put an oscilloscope on it. In other words, if users command a 4V signal out of the Clipper Board and scope it, the result is a small sinusoidal type wave centered on 4V. At the default PWM frequency and output resolution this will have a magnitude of about 250mV to 450mV and a frequency of about 30kHz. This is typically faster than any of the control loops so the amplifier essentially filters it out of the system.

For example, to double the resolution of the output signal, users merely double the I7000 value from 1001 to 2002. How does this affect the ripple? Testing shows the ripple magnitude to increase from around 300mV to well over 800mV. The frequency of the ripple decreased from about 30kHz to about 15kHz. Here are some measurements taken with a Clipper Board:

I7000 Value	Output Resolution Signed	Voltage Output Change Per 1bit increment In output register	PWM Frequency	Approximate Ripple Magnitude	Approximate Ripple Frequency
1001	@11 bit	9.9mV	29.4177 KHz	300mV	30 KHz
2002	@12 bit	4.99mV	14.72 KHz	800mV	15 KHz
4004	@13bit	2.49mV	7.36 KHz	2V	7 KHz

How does the ripple affect servo performance? It really depends on the system. For most servo systems the mechanics can't respond anywhere near these frequencies. Some systems with linear amplifiers will effect the performance especially as you lower the PWM frequency and effectively the ripple frequency, i.e. galvanometers, etc. In the overall majority of the servo world, these ripple frequencies will not show in the system due to mechanical and electrical time constants of most systems. This will happen regardless of the amplifier used.

So why is the recommended setup for 30 KHz? A few reasons, the first is aesthetics. Nobody wants to put a scope on an output signal and see 1 or 2V of hash. If you increase that frequency the hash is minimized. The second reason is response of the output with respect to the servo filter. If you increase the output resolution and thus lower the PWM frequency far enough you will notice some lag in the

system from the delays between the output register values actually being picked up by the slower PWM frequency.

For high response systems we suggest using ACC-8ES and a true 18bit DAC. However the filtered PWM technique will be more than adequate for most applications.

How changing I7000 affects other settings in PMAC

I7000 is does not only set the PWM frequency for the PWM outputs, but it also sets the Max Phase Frequency.

$$\text{MaxPhase Frequency} = 117,964.8 \text{ KHz} / [2 * I7000 + 3]$$

$$\text{PWM Frequency} = 117,964.8 \text{ KHz} / [4 * I7000 + 6]$$

The Max Phase Frequency is then divided by I7001 to generate the frequency for the phase interrupt and its routines. **If you change I7000, you have to change I7001 to keep the same phase interrupt.**

$$\text{PHASE Clock Frequency} = \text{MaxPhase Frequency} / (I7001 + 1)$$

The Phase Clock Frequency setting also affects the servo interrupt frequency. **If you change the phase interrupt frequency then you must change I7002 to keep the same servo interrupt.**

$$\text{Servo Clock Frequency} = \text{PHASE Clock Frequency} / (I7002 + 1)$$

When you change the servo interrupt, you must always change the servo interrupt time – I10 – to match, or all of your timing will be off in PMAC.

$$I10 = 8388608 / (\text{Servo Frequency (KHz)}) = 8388608 * \text{ServoTime(msec)}$$

If you decide to change I7000, be sure to reset Ixx69 to the proper safety setting per the following formula:

$$Ixx69 = \text{MaxVolts} / 10 * I7000$$

Examples:

Default Example:

$$I7000 = 1001$$

$$I7001 = 5$$

$$I7002 = 3$$

$$Ixx69 = 1024$$

$$I10 = 3421867$$

$$\text{MaxPhase Frequency} = 117,964.8 \text{ kHz} / [2 * 1001 + 3] = 58.835 \text{ KHz}$$

$$\text{PWM Frequency} = 117,964.8 \text{ kHz} / [4 * 1001 + 6] = 29.418 \text{ KHz}$$

$$\text{PHASE Clock Frequency} = \text{MaxPhase Frequency} / (5 + 1) = 9.805 \text{ KHz}$$

$$\text{Servo Clock Frequency} = \text{PHASE Clock Frequency} / (3 + 1) = 2.451 \text{ KHz}$$

$$I10 = 8388608 / (2.451471) = 3421867$$

$$Ixx69 = 10V / 10 * 1000 = 1001 \text{ add headroom to } 1024$$

To double the resolution, observe the following:

$$I7000=2002$$

$$\text{MaxPhase Frequency} = 117,964.8 \text{ KHz} / [2*2002+3] = 29.44 \text{ KHz}$$

$$\text{PWM Frequency} = 117,964.8 \text{ KHz} / [4*2002+6] = 14.72 \text{ KHz}$$

In order to save headroom on firmware routines that trigger off the phase and servo interrupts, it is best to keep those frequencies about the same as above. Some systems may want higher phase and servo interrupt frequencies for better servo performance, but these default frequencies are typically more than fast enough for many applications. Tuning parameter are discussed elsewhere in this document.

$$I7001 = 29.44 \text{ KHz} / 19.61\text{KHz} - 1 = @0.5 \text{ set it at 1 or } 14.72 \text{ KHz}$$

This is not exactly the same since I7001 is an integer value but the result is close enough for most users. Since we are doing any commutation with a +/-10V signal, it doesn't make that much of a difference. The Servo Frequency we will be able to get close though:

$$I7002 = 14.72\text{KHz} / 4.9 - 1 = 2.004 \text{ or } 2 \text{ which is @ } 4.9 \text{ KHz}$$

For a 10V max signal output:

$$Ixx69 = I900 + \text{headroom} = 2024$$

We must set I10 whenever we change the servo clock but since we kept it basically the same, I10 stays pretty much the same. Without rounding it works out to the following:

$$I10 = 8388608 / 4.906613 = 1709653$$

For precise timing within your motion application it is important not to round off when calculating I10.

Effects of Output Resolution and Servo Interrupt Frequency on Servo Gains

When you change your output resolution and/or servo interrupt timing, your tuning parameters will no longer respond the same. The system will have to be tuned again in order to achieve the desired performance. There is an approximate relation of output resolution to servo loop gains. If you were switching an application from a PMAC style 16bit DAC to a Clipper Board with default resolution of about 11bits you can expect a change of your gains in order to get similar response.

The max output value of the output command with a 16bit DAC is 32767. With the Clipper Board at its default parameters the max output value is 1001. If you had equal servo interrupt frequencies, the proportional gain on the Clipper Board would have a proportional gain 1001/32767 or about 1/32 smaller. This is more a rule of thumb than an exact formula. It is always recommended to go through a full tuning procedure when changing output resolution.

If you decide to change the Servo Interrupt Frequency, then you are also changing the dynamics of the servo filter and thus the system. You will need to retune the system in order to get the desired performance. If you increase the servo frequency you will need to lower the proportional gain in order to achieve similar performance. The reason you increased the frequency in the first place was more likely to achieve a higher performance so relations here are not very helpful.

If you desire to change servo interrupt frequency in order to have your foreground PLCs execute more often you can also adjust Ixx60 to keep your gains the same. See the Turbo PMAC Software Reference Manual for a further description of this parameter.

Using Flag I/O as General-Purpose I/O

Either the user flags or other not assigned axes flag on the base board can be used as general-purpose I/O for up to 20 inputs and 4 outputs at 5-24Vdc levels. The indicated suggested M-variables definitions, which are defined in the Software reference, allows accessing each particular line according to the following table:

Flag	Type	Channel Number			
		#1	#2	#3	#4
HOME	5-24 VDC Input	M120	M220	M320	M420
PLIM	5-24 VDC Input	M121	M221	M321	M421
MLIM	5-24 VDC Input	M122	M222	M322	M422
USER	5-24 VDC Input	M115	M215	M315	M415
AENA	5-24 VDC Output	M114	M214	M314	M414

Note:

When using these lines as regular I/O points the appropriate setting of the Ixx24 variable must be used to enable or disable the safety flags feature.

Analog Inputs Setup

The optional analog-to-digital converter inputs are ordered either through Option-12 or Option-2 on the axes expansion board. Each option provides two 12-bit analog inputs with a ± 10 Vdc range. The M-variables associated with these inputs provided a range of values between +2048 and -2048 for the respective ± 10 Vdc input range. The following is the software procedure to setup and read these ports.

CPU Analog Inputs

```
I7003 = 1746 ;Set ADC clock frequency at 4.9152 MHz
I7006 = $1FFFFFF ;Clock strobe set for bipolar inputs
M105->X:$3400,12,12,S ;ADCIN_1 on JMACH1 connector pin 45
M205->X:$3401,12,12,S ;ADCIN_2 on JMACH1 connector pin 46
```

General-Purpose Digital Inputs and Outputs

The lines on the JOPT general-purpose I/O connector will be mapped into PMAC's address space in register Y:\$78400.

Typically, these I/O lines are accessed individually with M-variables. Following is a suggested set of M-variable definitions to use these data lines.

```
M0->Y:$78400,0 ; Digital Output M00
M1->Y:$78400,1 ; Digital Output M01
M2->Y:$78400,2 ; Digital Output M02
M3->Y:$78400,3 ; Digital Output M03
M4->Y:$78400,4 ; Digital Output M04
M5->Y:$78400,5 ; Digital Output M05
M6->Y:$78400,6 ; Digital Output M06
M7->Y:$78400,7 ; Digital Output M07
M8->Y:$78400,8 ; Digital Input MI0
M9->Y:$78400,9 ; Digital Input MI1
M10->Y:$78400,10 ; Digital Input MI2
M11->Y:$78400,11 ; Digital Input MI3
M12->Y:$78400,12 ; Digital Input MI4
M13->Y:$78400,13 ; Digital Input MI5
M14->Y:$78400,14 ; Digital Input MI6
M15->Y:$78400,15 ; Digital Input MI7
```

```
M32->X:$78400,0,8      ; Direction Control bits 0-7 (1=output, 0 = input)
M34->X:$78400,8,8      ; Direction Control bits 8-15 (1=output, 0 = input)
M40->X:$78404,0,24     ; Inversion control (0 = 0V, 1 = 5V)
M42->Y:$78404,0,24     ; J9 port data type control (1 = I/O)
```

In order to properly setup the digital outputs an initialization PLC must be written scanning through once on power-up/reset, then disabling itself:

```
OPEN PLC1 CLEAR
M32=$FF                ;BITS 0-8 are assigned as output
M34=$0                 ;BITS 9-16 are assigned as input
M40=$FFF0              ;Define inputs and outputs
M42=$FFFF              ;All lines are I/O type
DIS PLC1               ;Disable PLC1 (scanning through once on
                       ;power-up/reset)
CLOSE
```

Note:

After loading this program, set I5=2 or 3 and ENABLE PLC 1.

Thumbwheel Port Digital Inputs and Outputs


The inputs and outputs on the thumbwheel multiplexer port J8 may be used as discrete, non-multiplexed I/O. In this case, these I/O lines can be accessed through M-variables:

```
M40->Y:$78402,8,1      ; SEL0 Output
M41->Y:$78402,9,1      ; SEL1 Output
M42->Y:$78402,10,1     ; SEL2 Output
M43->Y:$78402,11,1     ; SEL3 Output
M44->Y:$78402,12,1     ; SEL4 Output
M45->Y:$78402,13,1     ; SEL5 Output
M46->Y:$78402,14,1     ; SEL6 Output
M47->Y:$78402,15,1     ; SEL7 Output
M48->Y:$78402,8,8,U     ; SEL0-7 Outputs treated as a byte
M50->Y:$78402,0,1      ; DAT0 Input
M51->Y:$78402,1,1      ; DAT1 Input
M52->Y:$78402,2,1      ; DAT2 Input
M53->Y:$78402,3,1      ; DAT3 Input
M54->Y:$78402,4,1      ; DAT4 Input
M55->Y:$78402,5,1      ; DAT5 Input
M56->Y:$78402,6,1      ; DAT6 Input
M57->Y:$78402,7,1      ; DAT7 Input
M58->Y:$78402,0,8,U     ; DAT0-7 Inputs treated as a byte
```

HARDWARE REFERENCE SUMMARY

The following information is based on the Clipper Board, part number 603871-100.

Board Dimensions and Layout

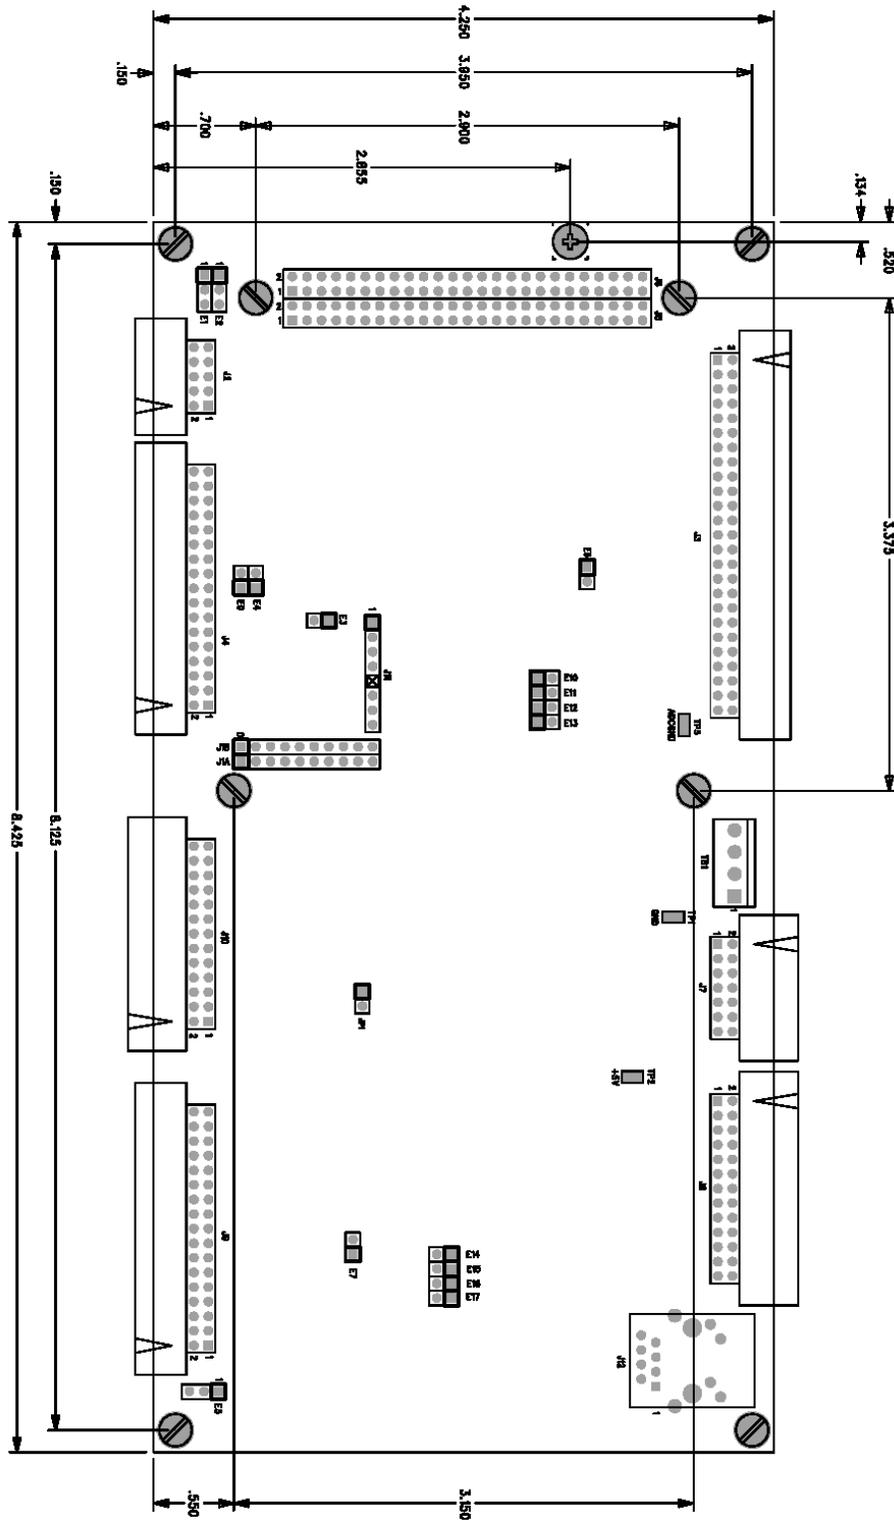

Connectors and Indicators

J2 - Serial Port (JRS232 Port)

This connector allows communicating with PMAC from a host computer through a RS-232 port. Delta Tau provides the Accessory 3L cable that connects the PMAC to a DB-9 connector.

1. 10-pin female flat cable connector T&B Ansley P/N 609-1041
2. Standard flat cable stranded 10-wire T&B Ansley P/N 171-10

J3 - Machine Connector (JMACH1 Port)

The primary machine interface connector is JMACH1, labeled J3 on the PMAC. It contains the pins for four channels of machine I/O: analog outputs, incremental encoder inputs, amplifier fault and enable signals and power-supply connections.

1. 50-pin female flat cable connector T&B Ansley P/N 609-5041
2. Standard flat cable stranded 50-wire T&B Ansley P/N 171-50
3. Phoenix varioface module type FLKM 50 (male pins) P/N 22 81 08 9

J4 - Machine Connector (JMACH2 Port)

This machine interface connector is labeled JMACH2 or J4 on the PMAC. It contains the pins for four channels of machine I/O: end-of-travel input flags, home flag and pulse-and-direction output signals. In addition, the B_WDO output allows monitoring the state of the Watchdog safety feature.

1. 34-pin female flat cable connector T&B Ansley P/N 609-3441
2. Standard flat cable stranded 34-wire T&B Ansley P/N 171-34
3. Phoenix varioface module type FLKM 34 (male pins) P/N 22 81 06 3

J7 - Machine Connector (JMACH3 Port)

This machine interface connector is labeled JMACH3 or J7 on the PMAC. It contains the pins for four channels of U, V, and W flags normally used for hall device commutation.

1. 14-pin female flat cable connector Delta Tau P/N 014-R00F14-0K0, T&B Ansley P/N 609-1441
2. 171-14 T&B Ansley standard flat cable stranded 14-wire
3. Phoenix varioface modules type FLKM14 (male pins) P/N 22 81 02 1

J8 - Thumbwheel Multiplexer Port (JTHW Port)

The Thumbwheel Multiplexer Port, or Multiplexer Port, on the JTHW connector has eight input lines and eight output lines. The output lines can be used to multiplex large numbers of inputs and outputs on the port, and Delta Tau provides accessory boards and software structures (special M-variable definitions) to capitalize on this feature. Up to 32 of the multiplexed I/O boards may be daisy-chained on the port, in any combination.

1. 26-pin female flat cable connector T&B Ansley P/N 609-2641
2. Standard flat cable stranded 26-wire T&B Ansley P/N 171.26
3. Phoenix varioface module type FLKM 26 (male pins) P/N 22 81 05 0

J9 - General-Purpose Digital Inputs and Outputs (JOPT Port)

Acc-1P's JOPT connector provides eight general-purpose digital inputs and eight general-purpose digital outputs. Each input and each output has its own corresponding ground pin in the opposite row. The 34-pin connector was designed for easy interface to OPTO-22 or equivalent optically isolated I/O modules. Delta Tau's Acc-21F is a six-foot cable for this purpose.

1. 34-pin female flat cable connector T&B Ansley P/N 609-3441
2. Standard flat cable stranded 34-wire T&B Ansley P/N 171-34

3. Phoenix varioface module type FLKM 34 (male pins) P/N 22 81 06 3

J10 – Handwheel and Pulse/Dir Connector (JHW/PD Port)

This connector is labeled JHW/PD or J10 on the PMAC. It provides pins for the two channels of Quadrature encoder inputs and Pulse and direction (PFM or PWM) output pairs from the DSPGate2 supplemental channels 1* and 2*.

1. 26-pin female flat cable connector T&B Ansley P/N 609-2641
2. Standard flat cable stranded 26-wire T&B Ansley P/N 171.26
3. Phoenix varioface module type FLKM 26 (male pins) P/N 22 81 05 0

J12 – Ethernet Communications Port

This connector provides access to the Ethernet communications feature. See the Machine Connections chapter for details on using this port.

TB1 – Power Supply Terminal Block (JPWR Connector)

This terminal block is the power supply connector for the board.

1. 4-pin terminal block, 0.150 pitch

LED Indicators


D3: This is a dual color LED. When this LED is green, it indicates that power is applied to the +5V input when this LED is red, it indicates that the watchdog timer has tripped.

E-POINT JUMPER DESCRIPTIONS

E0: Forced Reset Control

E Point and Physical Layout	Location	Description	Default
<p>E0</p> 		Factory use only; the board will not operate with E0 installed.	No jumper

E1 – E2: Serial Port Selection

E Point and Physical Layout	Location	Description	Default
<p>E1</p>  <p>E2</p>		<p>These jumpers select the target CPU for the serial port as either the main PMAC CPU or the Ethernet CPU (change IP address). Both jumpers must be set the same.</p> <ul style="list-style-type: none"> • 1-2 for Main CPU • 2-3 for Ethernet CPU 	1-2 Jumper installed


E3: Normal/Re-Initializing Power-Up/Reset

E Point and Physical Layout	Location	Description	Default
<p>E3</p> 		<p>Jump pin 1 to 2 to re-initialize on power-up/reset, loading factory default settings. Remove jumper for normal power-up/reset, loading user-saved settings.</p>	No jumper installed


E4: Watchdog Disable Jumper

E Point and Physical Layout	Location	Description	Default
<p>E14</p> 		<p>Jump pin 1 to 2 to disable Watchdog timer (for test purposes only). Remove jumper to enable Watchdog timer.</p>	No jumper

E5: Ethernet Port CPU Write Control Jumper

E Point and Physical Layout	Location	Description	Default
<p>E1</p>  <p>E2</p>		Jump pin 2 to 3 to enable programming of the Ethernet CPU. Jump pins 1 to 2 to write protect Ethernet CPU.	1-2 Jumper installed


E6: ADC Inputs Enable

E Point and Physical Layout	Location	Description	Default
<p>E16</p> 		Jump pin 1 to 2 to enable the Option-12 ADC inputs. Remove jumper to disable the ADC inputs, which might be necessary for reading current feedback signals from digital amplifiers.	No jumper

E10 – E12: Power-Up State Jumpers

E Point and Physical Layout	Location	Description	Default
<p>E10</p>  <p>E12</p>		Remove jumper E10; Jump E11; Jump E12; To read flash IC on power-up/reset Other combinations are for factory use only; the board will not operate in any other configuration.	No E10 jumper installed; Jump E11 and E12


E13: Power-Up/Reset Load Source

E Point and Physical Layout	Location	Description	Default
<p>E13</p> 		Jump pin 1 to 2 to reload firmware through serial or bus port. Remove jumper for normal operation.	No jumper

E14- E17: Ports Direction Control

E Point and Physical Layout	Location	Description	Default
<p>E14</p> 		Install jumper to make DATx lines inputs. No jumper to make DATx lines outputs.	Jumper installed
<p>E15</p> 		Install jumper to make SELx lines inputs. No jumper to make SELx lines outputs.	No jumper
<p>E16</p> 		Install jumper to make MOx lines inputs. No jumper to make MOx lines outputs.	No jumper
<p>E17</p> 		Install jumper to make MIx lines inputs. No jumper to make MIx lines outputs.	Jumper installed

CONNECTOR PINOUTS

J2 (JRS232) Serial Port Connector (10-PIN CONNECTOR)				 Front View
Pin#	Symbol	Function	Description	Notes
1	PHASE	Output	Phasing Clock	
2	DTR	Bidirect	Data Terminal Ready	Tied to "DSR"
3	TXD/	Input	Receive Data	Host transmit data
4	CTS	Input	Clear to Send	Host ready bit
5	RXD/	Output	Send Data	Host receive data
6	RTS	Output	Request to Send	PMAC ready bit
7	DSR	Bidirect	Data Set Ready	Tied to "DTR"
8	SERVO	Output	Servo Clock	
9	GND	Common	Digital Common	
10	+5V	Output	+5Vdc Supply	Power supply out


J3 (JMACH1): Machine Port Connector
(50-Pin Header)



Top View

Pin#	Symbol	Function	Description	Notes
1	+5V	Output	+5V Power	For encoders, 1
2	+5V	Output	+5V Power	For encoders, 1
3	GND	Common	Digital Common	For encoders, 1
4	GND	Common	Digital Common	For encoders, 1
5	CHA1	Input	Encoder A Channel Positive	2
6	CHA2	Input	Encoder A Channel Positive	2
7	CHA1/	Input	Encoder A Channel Negative	2,3
8	CHA2/	Input	Encoder A Channel Negative	2,3
9	CHB1	Input	Encoder B Channel Positive	2
10	CHB2	Input	Encoder B Channel Positive	2
11	CHB1/	Input	Encoder B Channel Negative	2,3
12	CHB2/	Input	Encoder B Channel Negative	2,3
13	CHC1	Input	Encoder C Channel Positive	2
14	CHC2	Input	Encoder C Channel Positive	2
15	CHC1/	Input	Encoder C Channel Negative	2,3
16	CHC2/	Input	Encoder C Channel Negative	2,3
17	CHA3	Input	Encoder A Channel Positive	2
18	CHA4	Input	Encoder A Channel Positive	2
19	CHA3/	Input	Encoder A Channel Negative	2,3
20	CHA4/	Input	Encoder A Channel Negative	2,3
21	CHB3	Input	Encoder B Channel Positive	2
22	CHB4	Input	Encoder B Channel Positive	2
23	CHB3/	Input	Encoder B Channel Negative	2,3
24	CHB4/	Input	Encoder B Channel Negative	2,3
25	CHC3	Input	Encoder C Channel Positive	2
26	CHC4	Input	Encoder C Channel Positive	2
27	CHC3/	Input	Encoder C Channel Negative	2,3
28	CHC4/	Input	Encoder C Channel Negative	2,3
29	DAC1	Output	Analog Output Positive 1	4
30	DAC2	Output	Analog Output Positive 2	4
31	DAC1/	Output	Analog Output Negative 1	4,5
32	DAC2/	Output	Analog Output Negative 2	4,5
33	AENA1/	Output	Amplifier-Enable 1	
34	AENA2/	Output	Amplifier -Enable 2	
35	FAULT1/	Input	Amplifier -Fault 1	6
36	FAULT2/	Input	Amplifier -Fault 2	6
37	DAC3	Output	Analog Output Positive 3	4
38	DAC4	Output	Analog Output Positive 4	4
39	DAC3/	Output	Analog Output Negative 3	4,5


J3 JMACH1 (50-Pin Header) (Continued)		 <p style="text-align: center;">Top View</p>		
Pin#	Symbol	Function	Description	Notes
40	DAC4/	Output	Analog Output Negative 4	4,5
41	AENA3/	Output	Amplifier -Enable 3	
42	AENA4/	Output	Amplifier -Enable 4	
43	FAULT3/	Input	Amplifier -Fault 3	6
44	FAULT4/	Input	Amplifier -Fault 4	6
45	ADCIN_1	Input	Analog Input 1	Option-12 required
46	ADCIN_2	Input	Analog Input 2	Option-12 required
47	FLT_FLG_V	Input	Amplifier Fault pull-up V+	
48	GND	Common	Digital Common	
49	+12V	Input	DAC Supply Voltage	7
50	-12V	Input	DAC Supply Voltage	7
<p>The J3 connector is used to connect PMAC to the first 4 channels (Channels 1, 2, 3, and 4) of servo amps and encoders.</p> <p>Note 1: These lines can be used as +5V power supply inputs to power PMAC's digital circuitry.</p> <p>Note 2: Referenced to digital common (GND). Maximum of ±12V permitted between this signal and its complement.</p> <p>Note 3: Leave this input floating if not used (i.e. digital single-ended encoders).</p> <p>Note 4: ±10V, 10 mA max, referenced to common ground (GND).</p> <p>Note 5: Leave floating if not used. Do not tie to GND.</p> <p>Note 6: Functional polarity controlled by variable Ixx24. Must be conducting to 0V (usually GND) to produce a 0 in PMAC software. Automatic fault function can be disabled with Ixx24.</p> <p>Note 7: Can be used to provide input power when the TB1 connector is not being used.</p>				


J4 (JMACH2): Machine Port CPU Connector (34-Pin Header)				
Pin#	Symbol	Function	Description	Notes
1	FLG 1 2 V	Input	Flags 1-2 Pull-Up	
2	FLG 3 4 V	Input	Flags 3-4 Pull-Up	
3	GND	Common	Digital Common	
4	GND	Common	Digital Common	
5	HOME1	Input	Home-Flag 1	10
6	HOME2	Input	Home-Flag 2	10
7	PLIM1	Input	Positive End Limit 1	8,9
8	PLIM2	Input	Positive End Limit 2	8,9
9	MLIM1	Input	Negative End Limit 1	8,9
10	MLIM2	Input	Negative End Limit 2	8,9
11	USER1	Input	User Flag 1	
12	USER2	Input	User Flag 2	
13	PUL 1	Output	Pulse Output 1	
14	PUL 2	Output	Pulse Output 2	
15	DIR 1	Output	Direction Output 1	
16	DIR 2	Output	Direction Output 2	
17	EQU1	Output	Encoder Comp-Equal 1	
18	EQU2	Output	Encoder Comp-Equal 2	
19	HOME3	Input	Home-Flag 3	10
20	HOME4	Input	Home-Flag 4	10
21	PLIM3	Input	Positive End Limit 3	8,9
22	PLIM4	Input	Positive End Limit 4	8,9
23	MLIM3	Input	Negative End Limit 3	8,9
24	MLIM4	Input	Negative End Limit 4	8,9
25	USER1	Input	User Flag 1	
26	USER2	Input	User Flag 2	
27	PUL 3	Output	Pulse Output 3	
28	PUL 4	Output	Pulse Output 4	
29	DIR 3	Output	Direction Output 3	
30	DIR 4	Output	Direction Output 4	
31	EQU3	Output	Encoder Comp-Equal 3	
32	EQU4	Output	Encoder Comp-Equal 4	
33	B_WDO	Output	Watchdog Out	Indicator/driver
34	No Connect			

Note 8: Pins marked *PLIMn* should be connected to switches at the *positive* end of travel. Pins marked *MLIMn* should be connected to switches at the *negative* end of travel.

Note 9: Must be conducting to 0V (usually GND) for PMAC to consider itself not into this limit. Automatic limit function can be disabled with Ixx24.


Note 10: Functional polarity for homing or other trigger use of HOMEn controlled by Encoder/Flag Variable I70n2. HMFLn selected for trigger by Encoder/Flag Variable I70n3. Must be conducting to 0V (usually GND) to produce a 0 in PMAC software.

J7 (JMACH3): Machine Port (14-Pin Header)				 Front View
Pin#	Symbol	Function	Description	Notes
1	GND	Common	Digital Common	
2	GND	Common	Digital Common	
3	CHU1+	Input	U-Flag Channel 1	
4	CHU2+	Input	U-Flag Channel 2	
5	CHV1+	Input	V-Flag Channel 1	
6	CHV2+	Input	V-Flag Channel 2	
7	CHW1+	Input	W-Flag Channel 1	
8	CHW2+	Input	W-Flag Channel 2	
9	CHU3+	Input	U-Flag Channel 3	
10	CHU4+	Input	U-Flag Channel 4	
11	CHV3+	Input	V-Flag Channel 3	
12	CHV4+	Input	V-Flag Channel 4	
13	CHW3+	Input	W-Flag Channel 3	
14	CHW4+	Input	W-Flag Channel 4	

J8 (JTHW): Multiplexer Port Connector				
(26-Pin Connector)				
Pin#	Symbol	Function	Description	Notes
1	GND	Common	PMAC Common	
2	GND	Common	PMAC Common	
3	DAT0	Input	Data-0 Input	Data input from multiplexed accessory
4	SEL0	Output	Select-0 Output	Multiplexer select output
5	DAT1	Input	Data -1 Input	Data input from multiplexed accessory
6	SEL1	Output	Select -1 Output	Multiplexer select output
7	DAT2	Input	Data -2 Input	Data input from multiplexed accessory
8	SEL2	Output	Select -2 Output	Multiplexer select output
9	DAT3	Input	Data -3 Input	Data input from multiplexed accessory
10	SEL3	Output	Select -3 Output	Multiplexer select output
11	DAT4	Input	Data -4 Input	Data input from multiplexed accessory
12	SEL4	Output	Select -4 Output	Multiplexer select output
13	DAT5	Input	Data -5 Input	Data input from multiplexed accessory
14	SEL5	Output	Select -5 Output	Multiplexer select output
15	DAT6	Input	Data -6 Input	Data input from multiplexed accessory
16	SEL6	Output	Select -6 Output	Multiplexer select output
17	DAT7	Input	Data -7 Input	Data input from multiplexed accessory
18	SEL7	Output	Select -7 Output	Multiplexer select output
19	N.C.	N.C.	No Connection	
20	GND	Common	PMAC Common	
21	N.C.	N.C.	No Connection	
22	GND	Common	PMAC Common	
23	N.C.	N.C.	No Connection	
24	GND	Common	PMAC Common	
25	+5V	Output	+5VDC Supply	Power supply out
26	INIT-	Input	PMAC Reset	Low is Reset

The JTHW multiplexer port provides 8 inputs and 8 outputs at TTL levels. While these I/O can be used in unmultiplexed form for 16 discrete I/O points, most users will utilize PMAC software and accessories to use this port in multiplexed form to greatly multiply the number of I/O that can be accessed on this port. In multiplexed form, some of the SELn outputs are used to select which of the multiplexed I/O are to be accessed.

The direction of the input and output lines on this connector are set by jumpers E14 and E15. If E14 is removed or E15 is installed then the multiplexing feature of the JTHW port cannot be used.

J9 (JOPT): I/O Port Connector					
(34-Pin Connector)				Front View	
Pin#	Symbol	Function	Description	Notes	
1	MI8	Input	Machine Input 8	Direction selectable	
2	GND	Common	PMAC Common		
3	MI7	Input	Machine Input 7	Direction selectable	
4	GND	Common	PMAC Common		
5	MI6	Input	Machine Input 6	Direction selectable	
6	GND	Common	PMAC Common		
7	MI5	Input	Machine Input 5	Direction selectable	
8	GND	Common	PMAC Common		
9	MI4	Input	Machine Input 4	Direction selectable	
10	GND	Common	PMAC Common		
11	MI3	Input	Machine Input 3	Direction selectable	
12	GND	Common	PMAC Common		
13	MI2	Input	Machine Input 2	Direction selectable	
14	GND	Common	PMAC Common		
15	MI1	Input	Machine Input 1	Direction selectable	
16	GND	Common	PMAC Common		
17	MO8	Output	Machine Output 8	Direction selectable	
18	GND	Common	PMAC Common		
19	MO7	Output	Machine Output 7	Direction selectable	
20	GND	Common	PMAC Common		
21	MO6	Output	Machine Output 6	Direction selectable	
22	GND	Common	PMAC Common		
23	MO5	Output	Machine Output 5	Direction selectable	
24	GND	Common	PMAC Common		
25	MO4	Output	Machine Output 4	Direction selectable	
26	GND	Common	PMAC Common		
27	MO3	Output	Machine Output 3	Direction selectable	
28	GND	Common	PMAC Common		
29	MO2	Output	Machine Output 2	Direction selectable	
30	GND	Common	PMAC Common		
31	MO1	Output	Machine Output 1	Direction selectable	
32	GND	Common	PMAC Common		
33	+5	Output	+5 Power I/O		
34	GND	Common	PMAC Common		

This connector provides means for 16 general-purpose inputs or outputs at TTL levels. The direction of the input and output lines on this connector are set by jumpers E16 and E17. Further software settings are required to configure this port. See the Software Setup section for details.

J10 (JHW) Handwheel Encoder Connector			
Pin#	Symbol	Function	Description
1	GND	Common	Reference voltage
2	+5V	Output	Supply voltage
3	HWA1+	Input	HW1 channel A+
4	HWA1-	Input	HW1 channel A-
5	HWB1+	Input	HW1 channel B+
6	HWB1-	Input	HW1 channel B-
7	HWA2+	Input	HW2 channel A+
8	HWA2-	Input	HW2 channel A-
9	HWB2+	Input	HW2 channel B+
10	HWB2-	Input	HW2 channel B-
11	PUL1+	Output	PULSE1+ output
12	PUL1-	Output	PULSE1- output
13	DIR1+	Output	DIRECTION1+ output
14	DIR1-	Output	DIRECTION1- output
15	PUL2+	Output	PULSE2+ output
16	PUL2-	Output	PULSE2- output
17	DIR2+	Output	DIRECTION2+ output
18	DIR2-	Output	DIRECTION2- output
19	TBD		
20	TBD		
21	TBD		
22	TBD		
23	HWANA+	Output	OPT12 Filtered PWM DAC+
24	HWANA-	Output	OPT12 Filtered PWM DAC-
25	GND	Common	Reference voltage
26	+5V	Output	Supply voltage

J12 Ethernet Port (Optional)


Pin #	Function
1	TXD+
2	TXD-
3	RXD+
4	No Connect
5	No Connect
6	RXD-
7	No Connect
8	No Connect
9	No Connect
10	No Connect

The appropriate Category 5 10/100-Base T network cable that mates to this connector can be readily purchased from any local computer store. The type of network cable to purchase depends on the configuration to the host PC.

When making a direct connection to a Host communication Ethernet card in a PC a cat 5 networking crossover cable must be used. A standard cat 5 straight through networking cable cannot be used in this scenario. When using a connection to a network hub or switch, the standard cat 5 straight through networking cable must be used, and not a crossover cable.

TB1 (JPWR): Power Supply


(4-Pin Terminal Block)

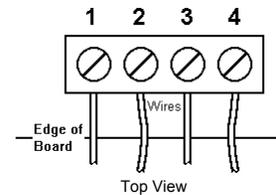


Pin#	Symbol	Function	Description	Notes
1	GND	Common	Digital Common	
2	+5V	Input	Logic Voltage	Supplies all PMAC digital circuits
3	+12V	Input	DAC Supply Voltage	Ref to Digital GND
4	-12V	Input	DAC Supply Voltage	Ref to Digital GND

This terminal block can be used to provide the input for the power supply for the circuits on the PMAC board when it is not in a bus configuration. When the PMAC is in a bus configuration, these supplies automatically come through the bus connector from the bus power supply; in this case, this terminal block should not be used.

SCHEMATICS

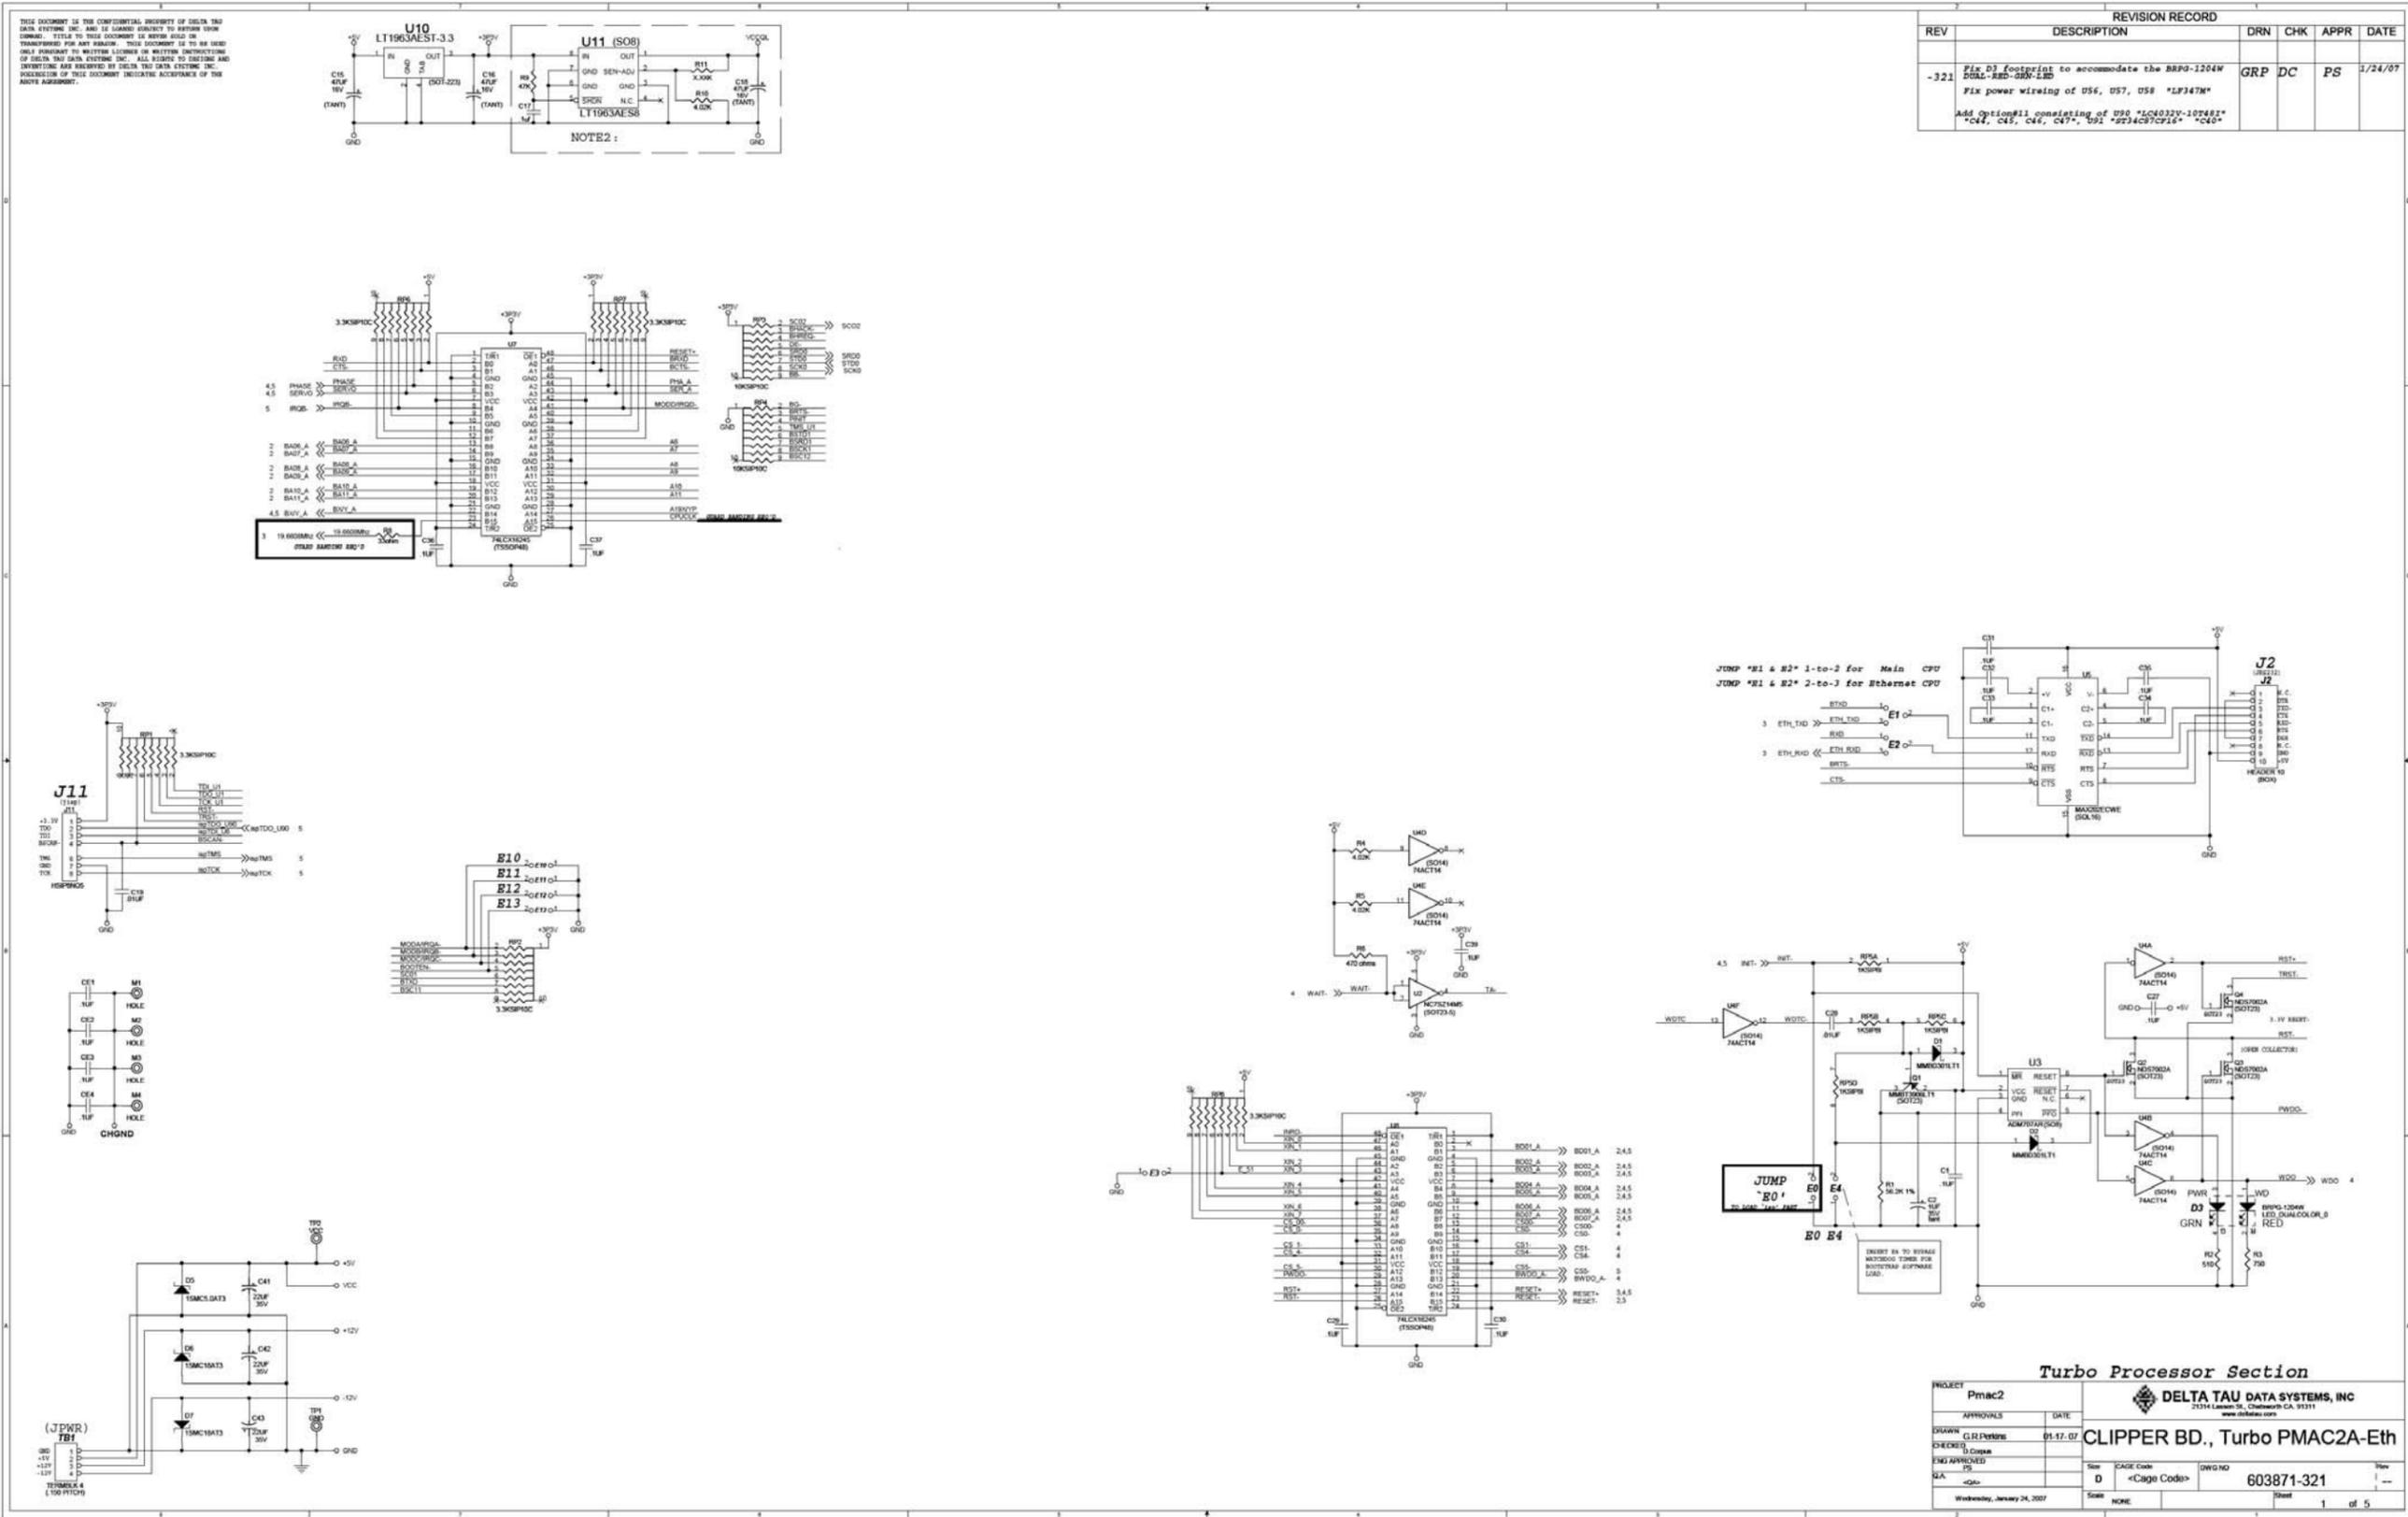


THIS DOCUMENT IS THE CONFIDENTIAL PROPERTY OF DELTA TAU DATA SYSTEMS, INC. AND IS LOANED EXCLUSIVELY TO RETURN FROM DELTA TAU DATA SYSTEMS, INC. IT IS NOT TO BE REPRODUCED, COPIED, TRANSMITTED, OR IN ANY MANNER DISCLOSED TO ANY OTHER PERSON OR ENTITY WITHOUT THE WRITTEN PERMISSION OF DELTA TAU DATA SYSTEMS, INC. ALL RIGHTS TO DELTA TAU DATA SYSTEMS, INC. ARE RESERVED BY DELTA TAU DATA SYSTEMS, INC. ACCEPTANCE OF THIS DOCUMENT INDICATES ACCEPTANCE OF THE ABOVE AGREEMENT.

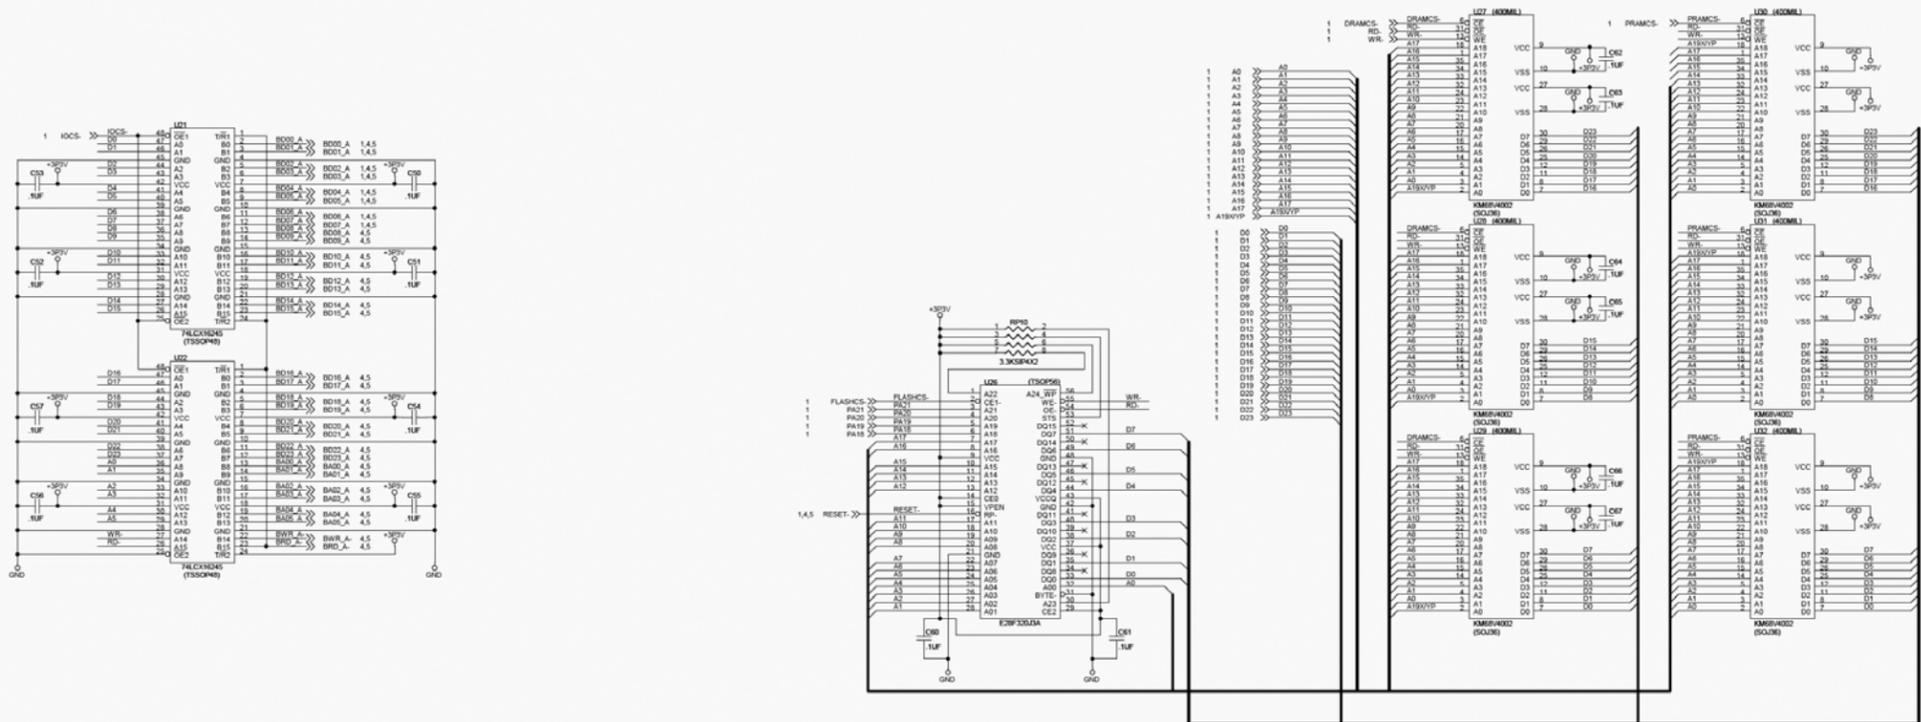


Memory Section



PROJECT	Pmac2	DATE	01-17-07
APPROVALS		DATE	
DRAWN	GJR/ptm	DATE	01-17-07
CHECKED	dc		
ENG APPROVED	ps		
DATE	01-17-07	SCALE	NONE
DELTA TAU DATA SYSTEMS, INC 2134 Lassen St., Chatsworth, CA, 91311 www.deltatau.com		CLIPPER BD., Turbo PMAC2A-Eth	
Sheet	2	DWG NO	603871-321
Scale	NONE	Rev	1
Weekend	January 17, 2007	Sheet	2 of 5

THIS DOCUMENT IS THE CONFIDENTIAL PROPERTY OF DELTA TAU DATA SYSTEMS, INC. AND IS LOANED SUBJECT TO RETURN UPON DEMAND. TITLE TO THIS DOCUMENT IS RESERVED AND NO TRANSFERING FOR ANY REASON. THIS DOCUMENT IS TO BE USED ONLY PURSUANT TO WRITTEN LICENSE OR WRITTEN INSTRUCTIONS OF DELTA TAU DATA SYSTEMS, INC. ALL RIGHTS TO DESIGN AND INVENTIONS ARE RESERVED BY DELTA TAU DATA SYSTEMS, INC. POSSESSION OF THIS DOCUMENT IMPLIES ACCEPTANCE OF THE ABOVE AGREEMENT.

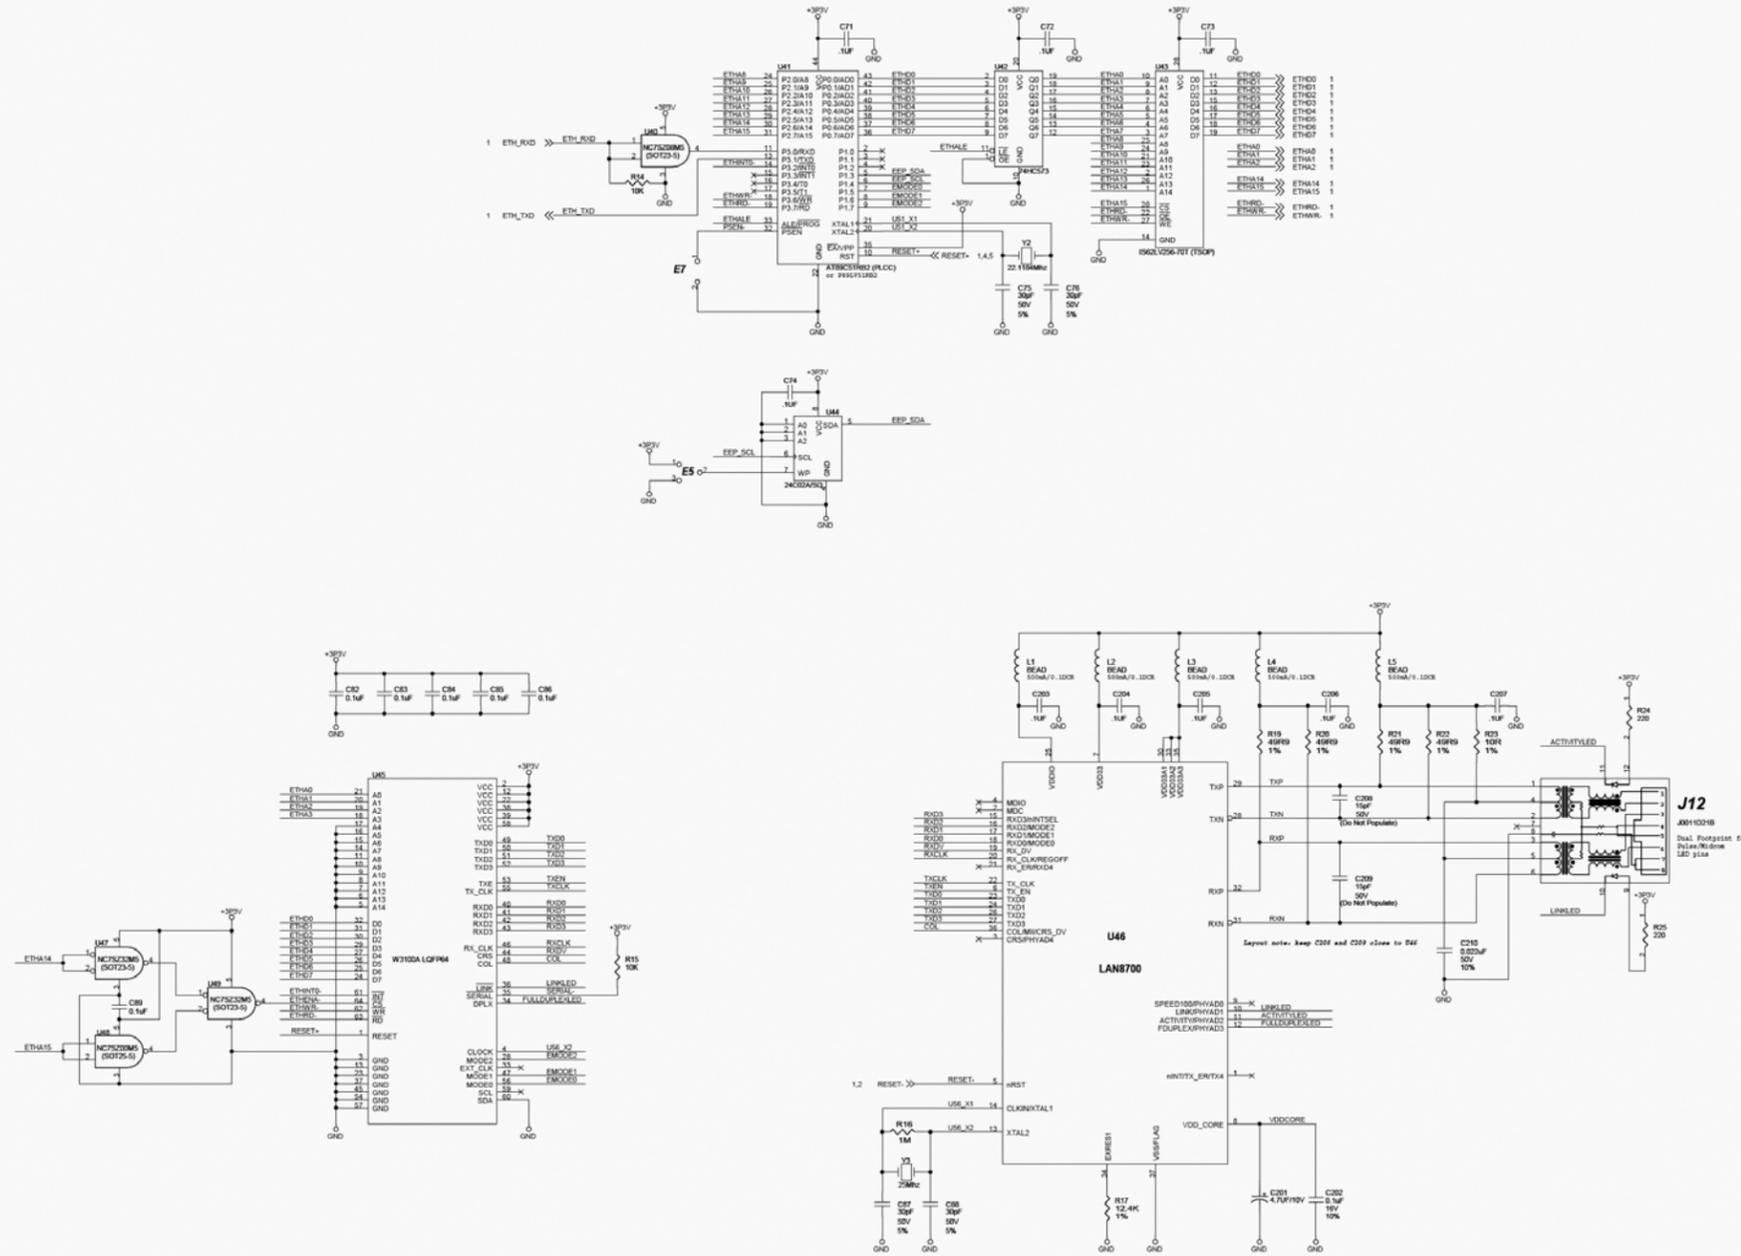

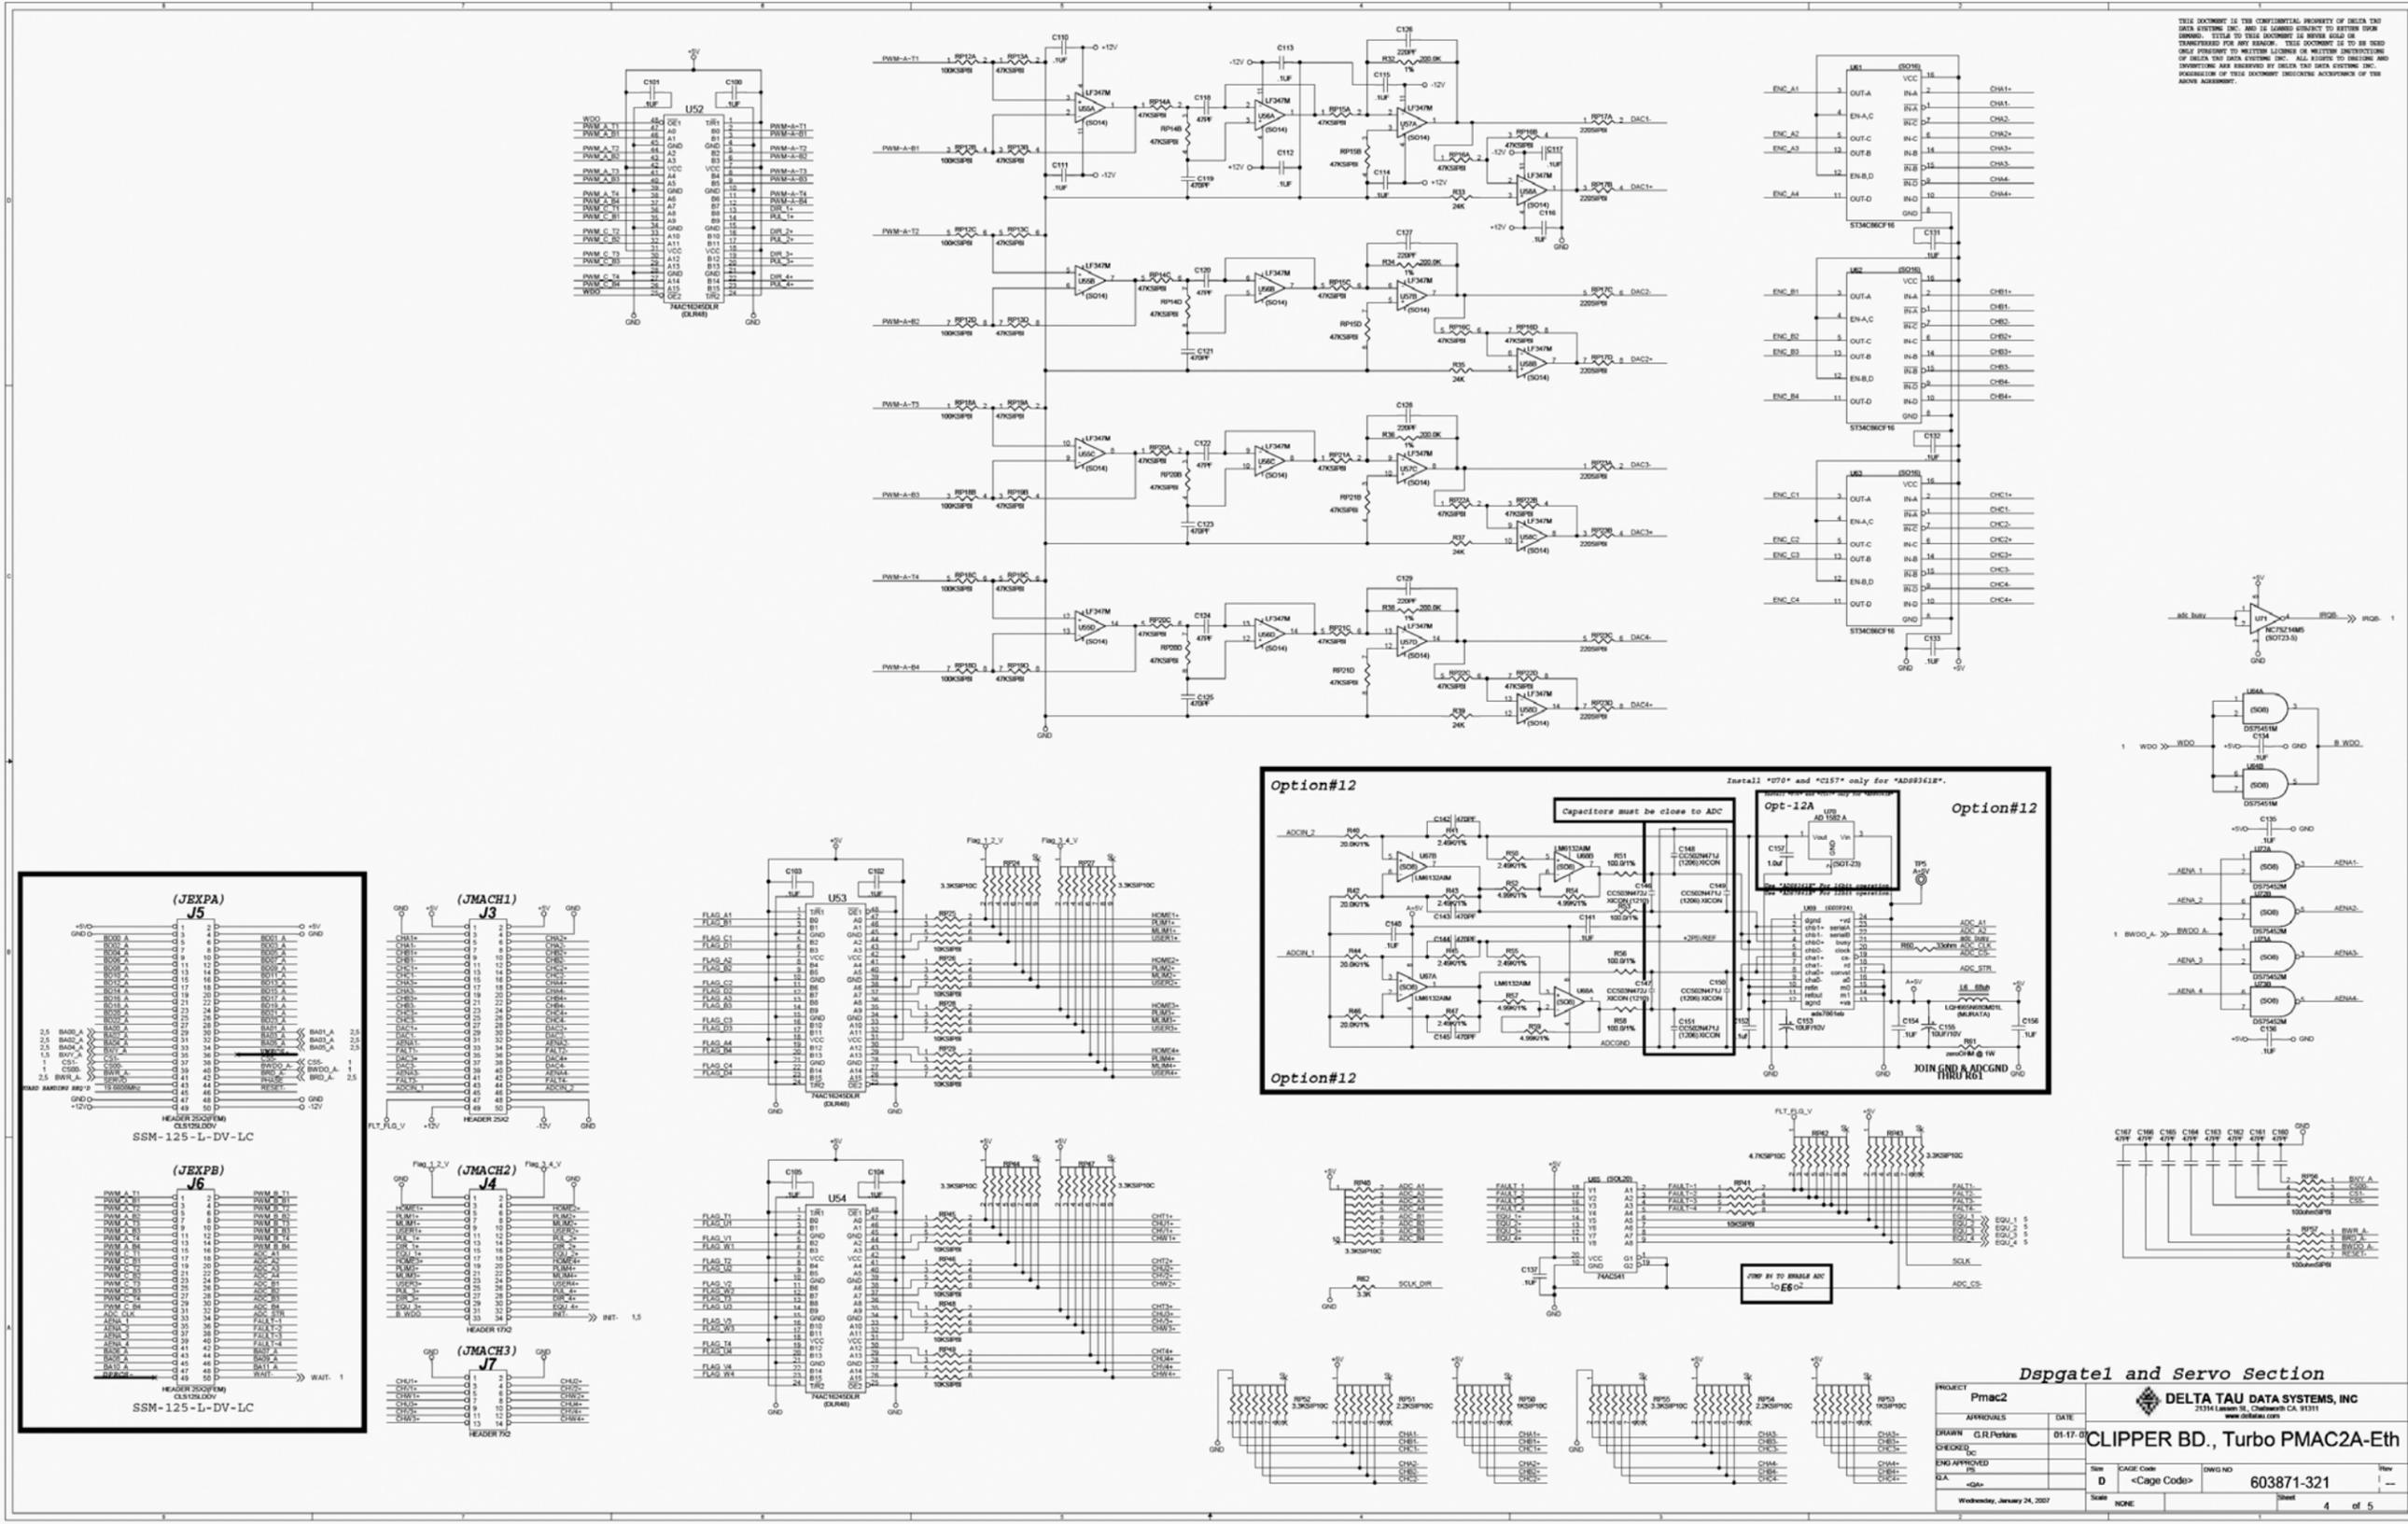

THIS DOCUMENT IS THE CONFIDENTIAL PROPERTY OF DELTA TAU DATA SYSTEMS, INC. AND IS LOANED DIRECTLY TO YOUR COMPANY. TITLE TO THIS DOCUMENT IS REVERTED TO DELTA TAU DATA SYSTEMS, INC. UPON THE COMPLETION OF THE PROJECT FOR WHICH IT WAS LOANED. THIS DOCUMENT IS TO BE USED ONLY IN ACCORDANCE WITH THE WRITTEN INSTRUCTIONS OF DELTA TAU DATA SYSTEMS, INC. ALL RIGHTS TO DESIGN AND INVENTION ARE RESERVED BY DELTA TAU DATA SYSTEMS, INC. PERMISSION OF THIS DOCUMENT INDICATES ACCEPTANCE OF THE ABOVE AGREEMENT.

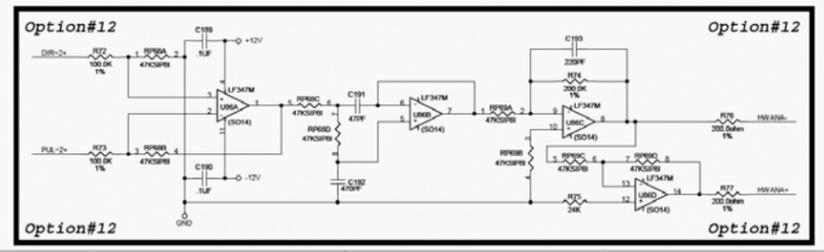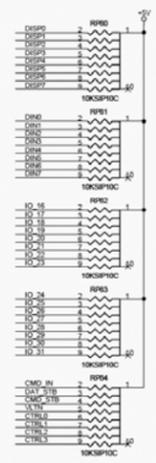

Dspgate2 and I/O Interface Section

PROJECT	Pmac2			DATE	01-17-07
APPROVALS		DATE			
DRAWN	G.R.Perkins				
CHECKED					
ENG APPROVED					
D.A.	<QA>	CAGE Code		DRWG NO	603871-321
Wednesday, January 24, 2007	Scale	NONE		Sheet	5 of 5