




许多人孜孜以求，但迄今无人能及...
Everybody strives for, nobody has achieved yet.



SR series

Super
Rigid

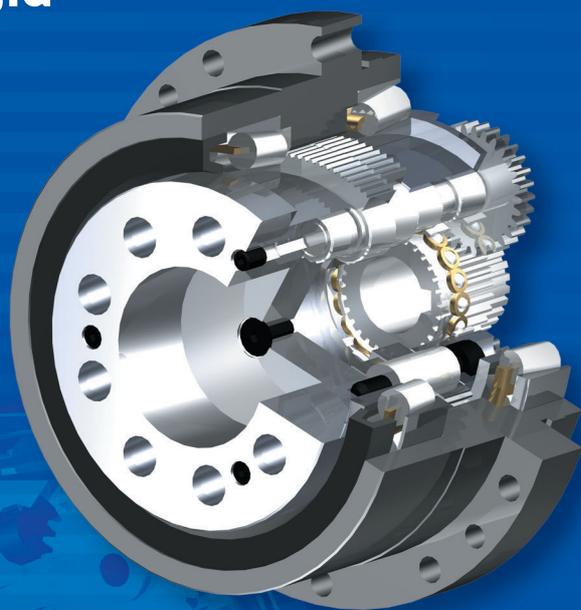


SEJINiGB
www.gear-box.com

SEJINiGB 超精密减速箱

SEJINiGB has progressed and expanded its business to keep pace with engineering innovations in advanced transmission technology.

SR series

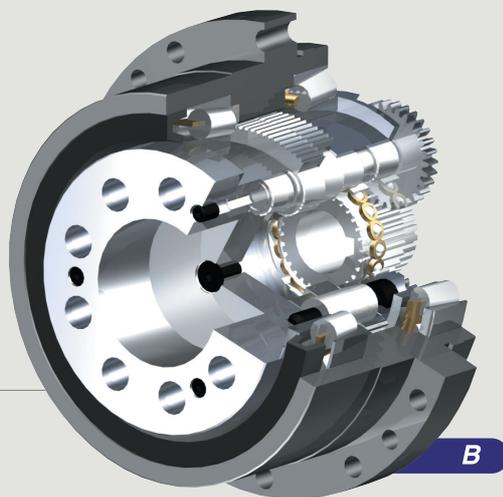

● 基本型 [Basic]

A2



紧凑短小型
[Compact & Short length]

C2



易用型(IP65)
[Easy to use (IP65)]

S



紧凑带输入轴型
[Compact with input shaft]

S2



带输入轴型(IP65)
[IP65 with input shaft]

- 优异的抗弯刚性/额定输出扭矩的10倍
- 采用全新的TTS齿形/提高了齿面接触率
- 速比范围宽/速比30~300
- 抗冲击能力强/额定输出扭矩的500%
- 精度高/传动回差小于1分
- 减小了高速运转时的振动
- 改进了输出端的密封
- 多种输入方式可供选择
- 输入齿轮三点对称接触，使得装配简便
- 采用对称的多支撑结构
- 输入转动惯量小
- 输入功率/0.4~20kW
- 额定输出扭矩/200~5000Nm
- 间歇周期工作制

- Super rigidity / 10 time moment load main bearing capacity of rated output torque
- New-TTS tooth shape applied / Improved tooth contact ratio
- Wide reduction range / Ratio30~300
- Shock resistance / 500%
- High precision / Lost motion less than 1arc.min.
- Reducing the vibration in high speed operation
- Improved output side sealing
- Various design or choice of input structure
- Easier assembly due to isometric 3 points contact
- Isometric multi supporting structure
- Lower input inertia
- Input capacity / 0.4~20kW
- Rated output torque / 200~5000Nm
- Intermittent periodic duty

● SR 系列 订货信息 [Ordering Information]

SR □□□ - □□□ - S/A - B/A2/C2/S/S2 - □□□

系列名 [Model name] 规格 [Frame No.] 速比 [Speed ratio] 材料 [Material] 输入形式 [Input style] 所配电机或输入轴径 [Applied motor or Input shaft Dia]


详细外形尺寸请从网站www.gear-box.com下载 / Visit www.gear-box.com to download detail external dimension.

SR-A2 type


■SR-A2 型 外形尺寸表 [SR-A2 type External dimension table]

| | D1 (ϕ) (H7) | D2 (ϕ) (h7) | D3 (ϕ) | D4 (ϕ) (h7) | D5 (ϕ) | D6* (ϕ) (H7) | ϕ Hx ϕ CBxDp* | L1 | L2 | L3 | L4* | L5* | L6 | L7* | L8* | L9 | L10 | P1 (PCD) | P2* (PCD) | P3 (PCD) | T1 | T1-1 | T2* | A° |
|-----|--------------------------|--------------------------|------------------|--------------------------|------------------|---------------------------|-------------------------|------|----|-----|------|-------|----|-----|-----|------|-------|-------------|--------------|-------------|----------|----------|----------|--------|
| 020 | 44 | 85 | 117 | 118 | 142 | 70 | 12-6.6x11x37 | 23.5 | 4 | 45 | 60 | 109 | 15 | 6 | 69 | 35 | 48 | 62 | 90 | 131 | 9-M10x13 | - | 4-M5x10 | 45° |
| 034 | 53 | 112 | 142 | 143 | 167 | 110 | 16-6.6x11x40.5 | 24.5 | 6 | 50 | 68.5 | 124.5 | 20 | 8 | 80 | 42.5 | 54 | 78 | 145 | 156 | 9-M12x17 | - | 4-M8x17 | 33.75° |
| 060 | 63 | 135 | 184 | 185 | 217 | 130 | 16-9x14x55 | 35.5 | 6 | 61 | 87 | 154 | 22 | 8 | 96 | 44.5 | 56 | 100 | 165 | 203 | 9-M14x20 | - | 4-M10x20 | 45° |
| 120 | 81 | 160 | 209 | 210 | 242 | 114.3 | 16-9x14x55 | 35.5 | 8 | 75 | 92 | 175 | 25 | 5 | 110 | 50.5 | 77.5 | 115 | 200 | 228 | 9-M16x23 | - | 4-M12x19 | 33.75° |
| 170 | 91 | 190 | 239 | 240 | 284 | 114.3 | 16-13x20x65 | 37 | 8 | 85 | 103 | 196 | 25 | 7 | 124 | 61 | 86.5 | 136 | 200 | 264 | 9-M16x25 | 6-M12x19 | 4-M12x24 | 45° |
| 230 | 96 | 220 | 279 | 280 | 324 | 200 | 16-13x20x75 | 47.5 | 8 | 100 | 121 | 229 | 30 | 7 | 148 | 73.5 | 98.5 | 155 | 235 | 304 | 9-M16x26 | 6-M16x26 | 4-M12x24 | 45° |
| 320 | 100 | 250 | 309 | 310 | 354 | 200 | 16-13x20x72 | 48.5 | 8 | 105 | 129 | 242 | 35 | 7 | 155 | 79 | 104.5 | 175 | 235 | 334 | 9-M16x26 | 6-M16x26 | 4-M12x24 | 45° |

- ▶ * 取决于所用电机 / * depend on applied motor.
- ▶ 当速比小于28时，输入转速不得高于参数表所列输入转速值的60% /
In case of ratio less than 28, input should not exceed 60% input speed on the specification.
- ▶ A° 电机法兰安装螺孔与齿轮箱安装通孔间的特征夹角 /
A° represents phase angle between motor installation tap and gearbox installation through hole.
- ▶ 连接尺寸适配所有通用伺服电机。 / Motor connection dimensions for all common servomotors are available.

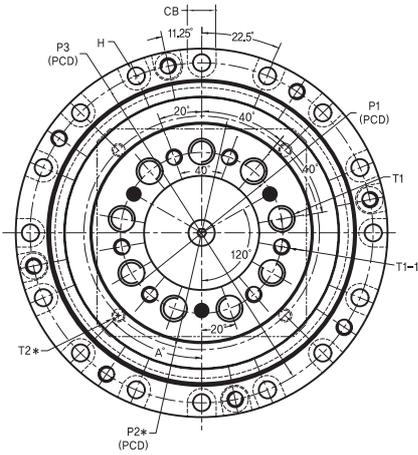


▶ SR 170, 230, 320

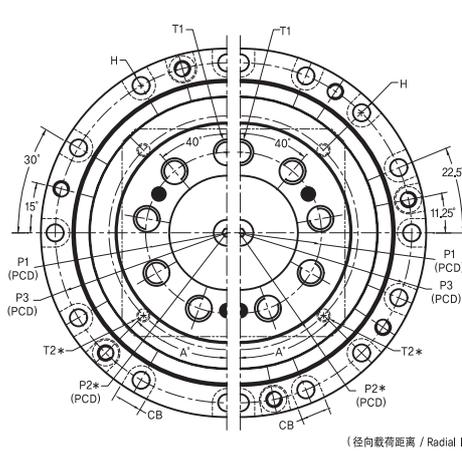

▶ SR 020

▶ SR 034, 060, 120

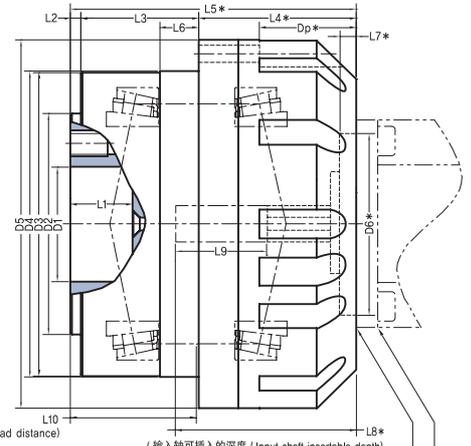


(输入轴可插入的深度 / Input shaft insertable depth)

用液态密封胶密封安装面
[Fluid sealant for mounting surface]
用密封胶密封螺栓螺纹
[Sealant for motor fixing bolt thread]

■SR-A2 型 输入端详细资料 [SR-A2 type detail of input side]

| | 速比 [Ratio] | ϕ A | B | C |
|-----|-------------------------------|----------|----|------|
| 020 | (22)/(27) | 19 | 6 | 12.1 |
| | 40/55/82/109 | 16 | 5 | 10.3 |
| | 67/100/133 | 14 | 5 | 9.3 |
| | 59.5/(82B)/122.5/163 | 11 | 4 | 7.3 |
| 034 | (15)/(21) | 22 | - | - |
| | 29/43/85/97/109 | 19 | 6 | 12.3 |
| | (40.2)/59.8/118.6/135.4/152.2 | 16 | 5 | 10.3 |
| | 71/141/161/181 | 14 | 5 | 9.3 |
| 060 | (57)/(85B)/169/193/217/(239) | 11 | 4 | 7.3 |
| | (15)/(20)/(25.5) | 28 | 8 | 17.3 |
| | 29/39/(57)/(67)/(115B)/133 | 28 | 8 | 17.3 |
| | 33/65 | 24 | 8 | 15.3 |
| 120 | 54.2/79.4/93.4/160.6/185.8 | 19 | 6 | 12.3 |
| | 43/58/85/100/115/172/199/229 | 19 | 6 | 12.3 |
| | (15)/(21)/(23.4) | 35 | 10 | 20.8 |
| | 29/39/(57.8)/65/(129B) | 35 | 10 | 20.8 |
| | 36/48.5/71/81/143.5/161 | 28 | 8 | 17.3 |
| | 40.2/54.2/79.4/90.6/180.2 | 28 | 8 | 17.3 |
| 170 | 45/(89) | 24 | 8 | 15.3 |
| | 57/77/113/129/229/257 | 19 | 6 | 12.3 |

| | 速比 [Ratio] | ϕ A | B | C |
|-----|-----------------------------|----------|----|------|
| 170 | (15)/(22) | 35 | 10 | 20.8 |
| | 31.8/42.8/47/77/139/126.4 | 35 | 10 | 20.8 |
| | 51.4/87/103.6/117.1/153/173 | 28 | 8 | 17.3 |
| | 186.25/206.2/233.2 | 28 | 8 | 17.3 |
| | 57/115/130/229/259 | 24 | 8 | 15.3 |
| 230 | 41.5/76/82/99/151/163/197 | 35 | 10 | 20.8 |
| | 59.9/118.8/131.2 | 28 | 8 | 17.3 |
| | 214.75/236.6/261.4 | 28 | 8 | 17.3 |
| 320 | 69.25/124.5/137.5 | 35 | 10 | 20.8 |
| | 43.75/58/86.5/172/190 | 35 | 10 | 20.8 |
| | 47.5/63/94 | 35 | 10 | 20.8 |
| | 112/224 | 35 | 10 | 20.8 |
| 500 | 36.34/142.36 | 42 | 12 | 24.3 |
| | 39/57/77/85/153/169 | 42 | 12 | 24.3 |
| | 48.5/71/96/106/191/211 | 35 | 10 | 20.8 |
| | 52.3/114.4/206.2/227.8 | 35 | 10 | 20.8 |

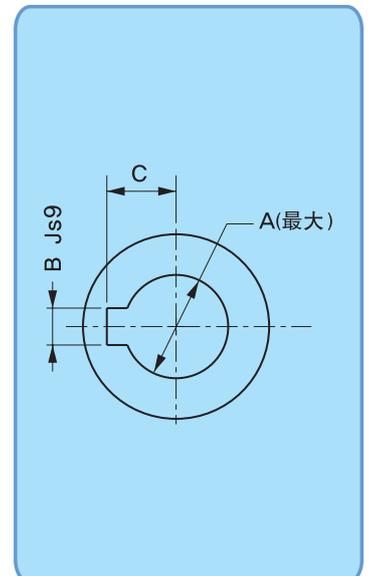

▶ () 可选速比 / () is optional ratio.

SR-C2 type

■SR-C2 型 外形尺寸表 [SR-C2 type External dimension table]

| | D1 (ϕ) (H7) | D2 (ϕ) (h7) | D3 (ϕ) | D4 (ϕ) (h7) | D5 (ϕ) | D6* (ϕ) | D7* (ϕ) (H7) | D8* (ϕ) | D9* (\square) | D10 (ϕ) | ϕ Hx ϕ CBxDp | L1 | L2 | L3 | L4 | L5* | L6* | L7 | L8* | L9* | L10 | P1 (PCD) | P2* (PCD) | P3 (PCD) | T1 | T1-1 | T2* | OR |
|-----|--------------------------|--------------------------|------------------|--------------------------|------------------|-------------------|---------------------------|-------------------|----------------------|-------------------|------------------------|------|----|-----|-------|-----|-------|----|-----|-----|-------|-------------|--------------|-------------|----------|----------|----------|------|
| 020 | 35 | 85 | 117 | 118 | 142 | 19 | 70 | 78 | 80 | 117 | 12-6.6x11x34 | 12.5 | 4 | 45 | 57 | 45 | 151 | 15 | 35 | 9 | 48 | 62 | 90 | 131 | 9-M10x14 | - | 4-M5x10 | S38 |
| 034 | 48 | 112 | 142 | 143 | 167 | 28 | 110 | 106 | 130 | 140 | 16-6.6x11x36 | 14 | 6 | 50 | 64 | 69 | 189 | 20 | 57 | 10 | 54 | 78 | 145 | 156 | 9-M12x17 | - | 4-M8x14 | S53 |
| 060 | 63 | 135 | 184 | 185 | 217 | 35 | 114.3 | 148 | 180 | 183 | 16-9x14x48 | 17 | 6 | 61 | 80 | 83 | 230 | 23 | 67 | 8 | 56 | 100 | 200 | 203 | 9-M14x20 | - | 4-M12x20 | S67 |
| 120 | 80 | 160 | 209 | 210 | 242 | 35 | 114.3 | 154 | 180 | 190 | 16-9x14x47.5 | 19.5 | 8 | 75 | 83.5 | 87 | 253.5 | 30 | 71 | 12 | 77.5 | 115 | 200 | 228 | 9-M16x23 | - | 4-M12x24 | S85 |
| 170 | 80 | 190 | 239 | 240 | 284 | 35 | 114.3 | 170.5 | 180 | 220 | 16-13x20x56.5 | 22.5 | 8 | 85 | 94.5 | 99 | 286.5 | 30 | 82 | 22 | 86.5 | 136 | 200 | 264 | 9-M16x25 | 6-M12x19 | 4-M12x24 | S85 |
| 230 | 96 | 220 | 279 | 280 | 324 | 35 | 114.3 | 176 | 180 | 236 | 16-13x20x61 | 22 | 8 | 100 | 107 | 90 | 305 | 35 | 72 | 12 | 98.5 | 155 | 200 | 304 | 9-M16x26 | 6-M16x26 | 4-M12x23 | S105 |
| 320 | 100 | 250 | 309 | 310 | 354 | 42 | 114.5 | 178 | 180 | 280 | 16-13x20x72.5 | 23 | 8 | 105 | 129.5 | 136 | 378.5 | 35 | 115 | 33 | 104.5 | 175 | 200 | 334 | 9-M16x26 | 6-M16x26 | 4-M12x32 | S110 |

- ▶ * 取决于所用电机 / * depend on applied motor.
- ▶ 当速比小于28时，输入转速不得高于参数表所列输入转速值的60%/
In case of ratio less than 28, input should not exceed 60% input speed on the specification.

SR-S type

■SR-S 型 外形尺寸表 [SR-S type External dimension table]

| | D1 (ϕ) (H7) | D2 (ϕ) (h7) | D3 (ϕ) | D4 (ϕ) (h7) | D5 (ϕ) | D6 (ϕ) (h7) | D7 (ϕ) | D8 (ϕ) | D9 (ϕ) | D10 (ϕ) (h7) | H (ϕ) | KG | KD | L1 | L2 | L3 | L4 | L5 | L6 | L7 | L8 | L9 | L10 | L11 | L12 | L13 | L14 | L15 | P1 (PCD) | P2 (PCD) | T1 | T1-1 | T2 | T3 | OR1 | OR2 |
|-----|--------------------------|--------------------------|------------------|--------------------------|------------------|--------------------------|------------------|------------------|------------------|---------------------------|-----------------|----|-----|------|----|-----|----|------|------|-------|----|-----|------|-----|------|-----|------|-------|-------------|-------------|----------|----------|--------|-------|------|---------------|
| 020 | 35 | 85 | 117 | 118 | 142 | 14 | 16 | 74 | 100 | 118 | 12-6.6 | 5 | 4 | 12.5 | 4 | 45 | 15 | 14.5 | 38.5 | 117 | 15 | 5.8 | 26.5 | 23 | 18.5 | 4.5 | 11.5 | 48 | 62 | 131 | 9-M10x14 | - | M5x10 | 6-M6 | S38 | S115 |
| 034 | 48 | 112 | 142 | 143 | 167 | 17 | 20 | 90 | 120 | 143 | 16-6.6 | 6 | 5 | 14 | 6 | 50 | 20 | 13.5 | 45.5 | 135 | 20 | 5 | 31 | 27 | 22 | 5 | 13.5 | 54 | 78 | 156 | 9-M12x17 | - | M6x12 | 8-M6 | S53 | S140 |
| 060 | 63 | 135 | 184 | 185 | 217 | 20 | 25 | 115 | 155 | 185 | 16-9 | 6 | 6.5 | 17 | 6 | 61 | 22 | 20.5 | 53 | 162.5 | 23 | 7 | 34.5 | 30 | 25 | 6.5 | 15 | 56 | 100 | 203 | 9-M14x20 | - | M8x16 | 8-M8 | S67 | ISO D1750G |
| 120 | 80 | 160 | 209 | 210 | 242 | 24 | 30 | 132 | 190 | 210 | 16-9 | 8 | 8 | 19.5 | 8 | 75 | 25 | 18.5 | 63.5 | 190 | 30 | 5 | 42.5 | 38 | 31 | 7 | 19 | 77.5 | 115 | 228 | 9-M16x23 | - | M8x19 | 8-M8 | S85 | ISO D2000G |
| 170 | 80 | 190 | 239 | 240 | 284 | 28 | 35 | 155 | 210 | 240 | 16-13 | 8 | 10 | 22.5 | 8 | 85 | 25 | 23.5 | 74.5 | 216 | 30 | 8 | 50.5 | 44 | 36 | 8 | 22 | 86.5 | 136 | 264 | 9-M16x25 | 6-M12x19 | M10x23 | 8-M12 | S85 | ISO D2300G |
| 230 | 96 | 220 | 279 | 280 | 324 | 32 | 38 | 172 | 220 | 280 | 16-13 | 10 | 11 | 22 | 8 | 100 | 30 | 25.5 | 87 | 250.5 | 35 | 8 | 57 | 50 | 41 | 9 | 25 | 98.5 | 155 | 304 | 9-M16x26 | 6-M16x26 | M12x24 | 8-M12 | S105 | ISO D2720G |
| 320 | 100 | 250 | 309 | 310 | 354 | 50 | 42 | 188 | 250 | 310 | 16-13 | 12 | 16 | 23 | 8 | 105 | 35 | 27.5 | 105 | 280.5 | 35 | 10 | 71 | 64 | 53 | 11 | 32 | 104.5 | 175 | 334 | 9-M16x26 | 6-M16x26 | M16x34 | 8-M12 | S110 | ISO D3000G |


- ▶ 当速比小于28时，输入转速不得高于参数表所列输入转速值的60%/
In case of ratio less than 28, input should not exceed 60% input speed on the specification.

SR-S2 type


■SR-S2 型 外形尺寸表 [SR-S2 type External dimension table]

| | D1 (ϕ) (H7) | D2 (ϕ) (h7) | D3 (ϕ) | D4 (ϕ) (h7) | D5 (ϕ) | D6 (ϕ) (h7) | D7 (ϕ) | ϕ Hx ϕ CBxDp | KG | KD | L1 | L2 | L3 | L4 | L5 | L6 | L7 | L8 | L9 | L10 | L11 | L12 | P1 (PCD) | P2 (PCD) | T1 | T1-1 | T2 | OR |
|-----|--------------------------|--------------------------|------------------|--------------------------|------------------|--------------------------|------------------|------------------------|----|-----|------|----|-----|-------|------|-------|----|----|------|-----|-----|-------|-------------|-------------|----------|----------|--------|------|
| 020 | 35 | 85 | 117 | 118 | 142 | 14 | 16 | 12-6.6x11x25.5 | 5 | 4 | 12.5 | 4 | 45 | 48.5 | 23.5 | 121 | 15 | 23 | 18.5 | 4.5 | 12 | 48 | 62 | 131 | 9-M10x14 | - | M5x10 | S38 |
| 034 | 48 | 112 | 142 | 143 | 167 | 17 | 20 | 16-6.6x11x28.5 | 6 | 5 | 14 | 6 | 50 | 56.5 | 27.5 | 140 | 20 | 27 | 22 | 5 | 14 | 54 | 78 | 156 | 9-M12x17 | - | M6x12 | S53 |
| 060 | 63 | 135 | 184 | 185 | 217 | 20 | 25 | 16-9x14x38 | 6 | 6.5 | 17 | 6 | 61 | 70 | 31 | 168 | 23 | 30 | 25 | 6.5 | 16 | 56 | 100 | 203 | 9-M14x20 | - | M8x16 | S67 |
| 120 | 80 | 160 | 209 | 210 | 242 | 24 | 30 | 16-9x14x37.5 | 8 | 8 | 19.5 | 8 | 75 | 73.5 | 39 | 195.5 | 30 | 38 | 31 | 7 | 20 | 77.5 | 115 | 228 | 9-M16x23 | - | M8x19 | S85 |
| 170 | 80 | 190 | 239 | 240 | 284 | 28 | 35 | 16-13x20x46.5 | 8 | 10 | 22.5 | 8 | 85 | 84.5 | 45 | 222.5 | 30 | 44 | 36 | 8 | 23 | 86.5 | 136 | 264 | 9-M16x25 | 6-M12x19 | M10x23 | S85 |
| 230 | 96 | 220 | 279 | 280 | 324 | 32 | 38 | 16-13x20x52 | 10 | 11 | 22 | 8 | 100 | 98 | 52 | 258 | 35 | 50 | 41 | 9 | 27 | 98.5 | 155 | 304 | 9-M16x26 | 6-M16x26 | M12x24 | S105 |
| 320 | 100 | 250 | 309 | 310 | 354 | 50 | 42 | 16-13x20x58.5 | 12 | 16 | 23 | 8 | 105 | 115.5 | 65 | 293.5 | 35 | 64 | 53 | 11 | 33 | 104.5 | 175 | 334 | 9-M16x26 | 6-M16x26 | M16x34 | S110 |

- ▶ 当速比小于28时，输入转速不得高于参数表所列输入转速值的60%/
In case of ratio less than 28, input should not exceed 60% input speed on the specification.

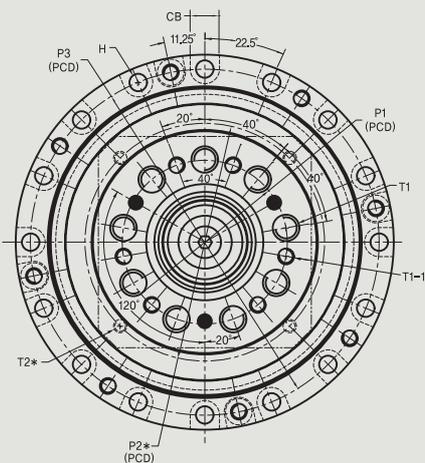


► SR 170, 230, 320

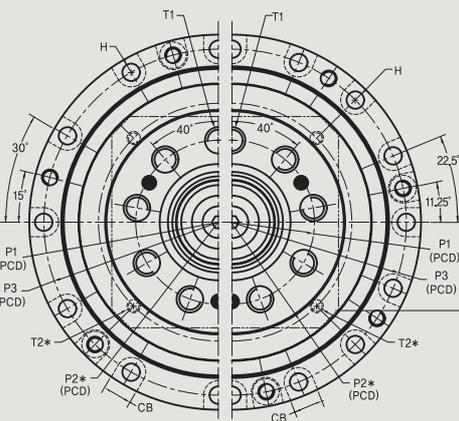


► SR 020


► SR 034, 060, 120

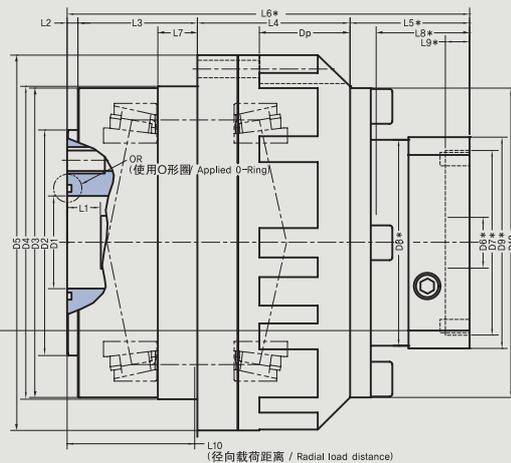

(径向载荷距离 / Radial load distance)

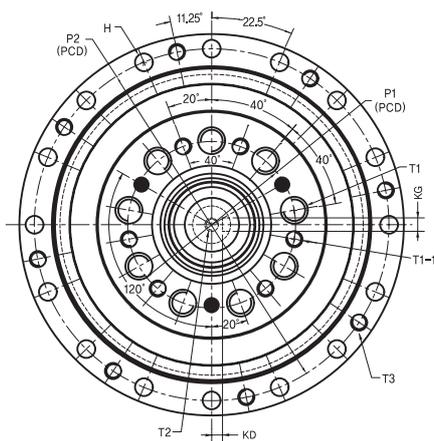


► SR 170, 230, 320

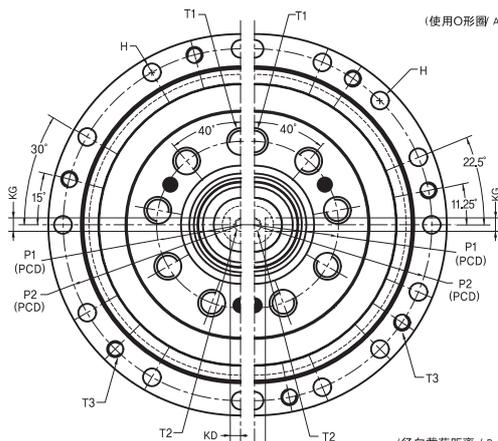


► SR 020

► SR 034, 060, 120

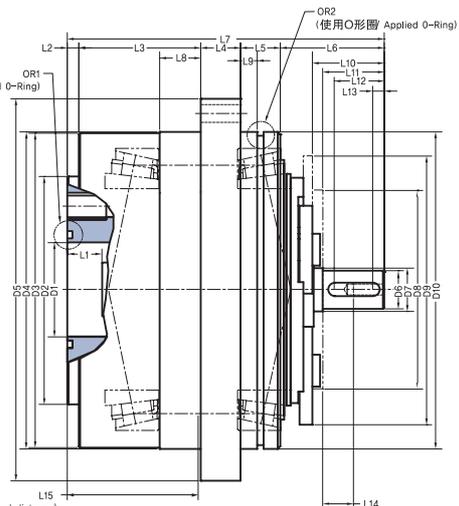


(径向载荷距离 / Radial load distance)

(径向载荷距离 / Radial load distance)

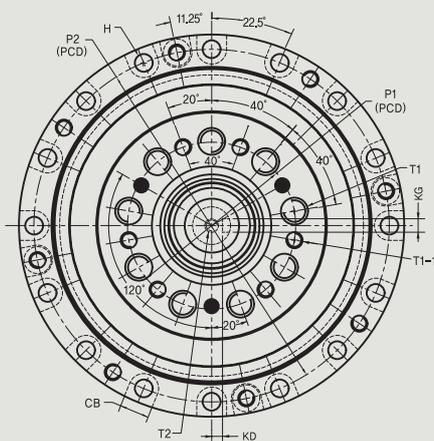


► SR 170, 230, 320

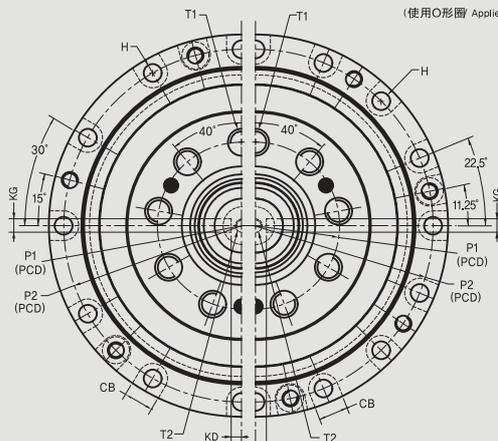

► SR 020

► SR 034, 060, 120

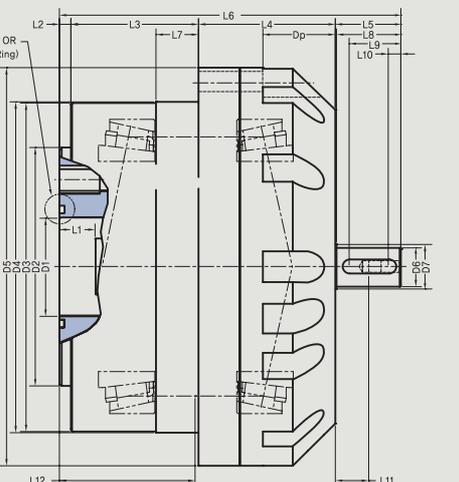

(径向载荷距离 / Radial load distance)


(径向载荷距离 / Radial load distance)

SR-B type

■SR-B 型 外形尺寸表 [SR-B type External dimension table]


| | D1 (ϕ) (H7) | D2 (ϕ) (h7) | D3 (ϕ) | D4 (ϕ) (h7) | D5 (ϕ) | D6 (ϕ) | D7 (ϕ) | D8 (ϕ) | D9 (ϕ) (h7) | H (ϕ) | L1 | L2 | L3 | L4 | L5 | L6 | L7 | L8 | L9 | L10 | L11 | L12* | L13 | L14 | L15 | P1 (PCD) | P2 (PCD) | T1 | T1-1 | T2 | OR |
|------------|--------------------------|--------------------------|------------------|--------------------------|------------------|------------------|------------------|------------------|--------------------------|-----------------|------|----|-----|----|------|------|-------|----|-----|------|------|-------|------|-------|-----|-------------|-------------|----------|----------|-------|---------------|
| 020 | 44 | 85 | 117 | 118 | 142 | 74 | 100 | 105 | 118 | 12-6.6 | 23.5 | 4 | 45 | 15 | 15.5 | 21.5 | 101 | 15 | 5.8 | 9.5 | 7 | 61 | 35 | 48 | 3 | 62 | 131 | 9-M10x14 | - | 6-M6 | S115 |
| 034 | 53 | 112 | 142 | 143 | 167 | 90 | 120 | 130 | 143 | 16-6.6 | 24.5 | 6 | 50 | 20 | 15 | 23.5 | 114.5 | 20 | 5 | 9 | 6.5 | 70 | 42.5 | 54 | 3.5 | 78 | 156 | 9-M12x17 | - | 8-M6 | S140 |
| 060 | 63 | 135 | 184 | 185 | 217 | 115 | 155 | 165 | 185 | 16-9 | 35.5 | 6 | 61 | 22 | 22 | 32.5 | 143.5 | 23 | 7 | 14 | 11 | 85.5 | 44.5 | 56 | 4.5 | 100 | 203 | 9-M14x20 | - | 8-M8 | ISO D1750G |
| 120 | 81 | 160 | 209 | 210 | 242 | 132 | 190 | 190 | 210 | 16-9 | 35.5 | 8 | 75 | 25 | 20 | 39 | 167 | 30 | 5 | 18 | 15 | 102 | 50.5 | 77.5 | 4.5 | 115 | 228 | 9-M16x23 | - | 8-M8 | ISO D2000G |
| 170 | 91 | 190 | 239 | 240 | 284 | 155 | 210 | 220 | 240 | 16-13 | 37 | 8 | 85 | 25 | 25 | 43 | 186 | 30 | 8 | 19 | 14.5 | 114 | 61 | 86.5 | 5.5 | 136 | 264 | 9-M16x25 | 6-M12x19 | 8-M12 | ISO D2300G |
| 230 | 96 | 220 | 279 | 280 | 324 | 172 | 220 | 250 | 280 | 16-13 | 47.5 | 8 | 100 | 30 | 27 | 53.5 | 218.5 | 35 | 8 | 23 | 19 | 137.5 | 73.5 | 98.5 | 7.5 | 155 | 304 | 9-M16x26 | 6-M16x19 | 8-M12 | ISO D2220G |
| 320 | 100 | 250 | 309 | 310 | 354 | 188 | 250 | 280 | 310 | 16-13 | 48.5 | 8 | 105 | 35 | 30 | 53.5 | 231.5 | 35 | 10 | 20 | 16 | 144.5 | 79 | 104.5 | 7.5 | 175 | 334 | 9-M16x26 | 6-M16x26 | 8-M12 | ISO D3000G |
| 500 *** | 116 | 260 | 329 | 330 | 380 | 210 | 290 | 300 | 330 | 16-16 | 54.5 | 8 | 120 | 40 | 37 | 56 | 261 | 45 | 12 | 21.5 | 16 | 168.5 | 100 | 102.5 | 7.5 | 195 | 357 | 9-M12x24 | 6-M16x26 | 8-M14 | P315 |

- ▶ * 输入轴可插入的深度 / * is input shaft insertable depth
- ▶ 当速比小于28时，输入转速不得高于参数表所列输入转速值的60% /
In case of ratio less than 28, input should not exceed 60% input speed on the specification.

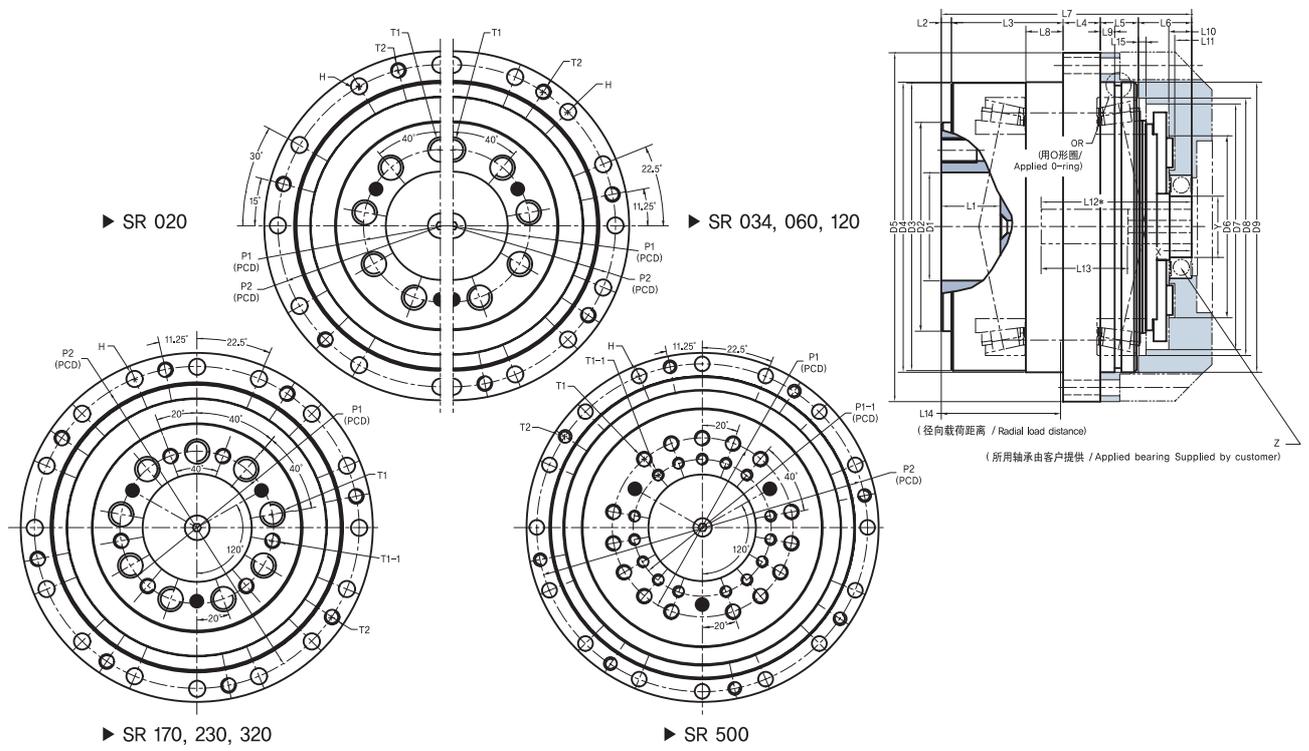

■SR-B 型 输入端详细资料 [SR-B type detail of input side]

| | 速比 [Ratio] | 输入端详细资料 | | | | | |
|-----|-------------------------------|----------|----|------|----|--------------|-------|
| | | ϕA | B | C | X | $\phi Y(h6)$ | Z |
| 020 | (22)/(27) | 19 | 6 | 12.1 | 7 | 30 | 6806 |
| | 40/55/82/109 | 16 | 5 | 10.3 | 7 | 30 | 6806 |
| | 67/100/133 | 14 | 5 | 9.3 | 9 | 25 | 6905 |
| | 59.5/(82B)/122.5/163 | 11 | 4 | 7.3 | 9 | 25 | 6905 |
| 034 | (15)/(21) | 22 | - | - | 7 | 35 | 6807 |
| | 29/43/85/97/109 | 19 | 6 | 12.3 | 9 | 30 | 6906 |
| | (40.2)/59.8/118.6/135.4/152.2 | 16 | 5 | 10.3 | 9 | 30 | 6906 |
| | 71/141/161/181 | 14 | 5 | 9.3 | 8 | 25 | 16005 |
| 060 | (57)/(85B)/169/193/217/(239) | 11 | 4 | 7.3 | 8 | 25 | 16005 |
| | (15)/(20)/(25.5) | 28 | 8 | 17.3 | 12 | 40 | 6908 |
| | 29/39/(57)/(67)/(115B)/133 | 28 | 8 | 17.3 | 12 | 40 | 6908 |
| | 33/65 | 24 | 8 | 15.3 | 12 | 40 | 6908 |
| 120 | 54.2/79.4/93.4/160.6/185.8 | 19 | 6 | 12.3 | 14 | 35 | 6007 |
| | 43/58/85/100/115/172/199/229 | 19 | 6 | 12.3 | 14 | 35 | 6007 |
| | (15)/(21)/(23.4) | 35 | 10 | 20.8 | 16 | 50 | 6010 |
| | 29/39/(57.8)/65/(129B) | 35 | 10 | 20.8 | 16 | 50 | 6010 |
| 170 | 36/48.5/71/81/143.5/161 | 28 | 8 | 17.3 | 18 | 40 | 6208 |
| | 40.2/54.2/79.4/90.6/180.2 | 28 | 8 | 17.3 | 18 | 40 | 6208 |
| | 45/(89) | 24 | 8 | 15.3 | 18 | 40 | 6208 |
| | 57/77/113/129/229/257 | 19 | 6 | 12.3 | 17 | 32 | 62/32 |
| 230 | (15)/(22) | 35 | 10 | 20.8 | 16 | 50 | 6010 |
| | 31.8/42.8/47/77/139/126.4 | 35 | 10 | 20.8 | 16 | 50 | 6010 |
| | 51.4/87/103.6/117.1/153/173 | 28 | 8 | 17.3 | 18 | 40 | 6208 |
| | 186.25/206.2/233.2 | 28 | 8 | 17.3 | 18 | 40 | 6208 |
| 320 | 57/115/130/229/259 | 24 | 8 | 15.3 | 18 | 40 | 6208 |
| | 41.5/76/82/99/151/163/197 | 35 | 10 | 20.8 | 20 | 50 | 6210 |
| | 59.9/118.8/131.2 | 28 | 8 | 17.3 | 23 | 40 | 6308 |
| | 214.75/236.6/261.4 | 28 | 8 | 17.3 | 23 | 40 | 6308 |
| 500 | 69.25/124.5/137.5 | 35 | 10 | 20.8 | 18 | 55 | 6011 |
| | 43.75/58/86.5/172/190 | 35 | 10 | 20.8 | 18 | 55 | 6011 |
| | 47.5/63/94 | 35 | 10 | 20.8 | 18 | 55 | 6011 |
| | 112/224 | 35 | 10 | 20.8 | 20 | 50 | 6211 |
| 500 | 36.34/142.36 | 42 | 12 | 24.3 | 18 | 65 | 6013 |
| | 39/57/77/85/153/169 | 42 | 12 | 24.3 | 18 | 65 | 6013 |
| | 48.5/71/96/106/191/211 | 35 | 10 | 20.8 | 21 | 55 | 6211 |
| | 52.3/114.4/206.2/227.8 | 35 | 10 | 20.8 | 21 | 55 | 6211 |

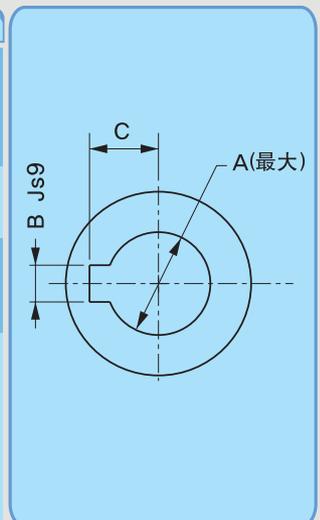

▶ () 可选速比, / () is optional ratio.



www.gear-box.com



进入公司网站首页 ...
Visit our website...



详细查看每个系列。
View each series in detail.



利用网页总图快速查找。
Utilize our comprehensive site map for quick searches.



注册以获取更多服务和信息。
Register for further services and information.

SEJINiGB
www.gear-box.com

iGB-020927

SEJINiGB Co., Ltd.

Tel: 032-621-1825 / Fax: 032-621-1830 E-mail: gearbox@gear-box.com

Block 102-103 Puchon Techno park, #364 Samjeong-Dong, Ohjeong-Gu, Puchon-City, Kyonggi-Do, Korea 421-150

Tel: ++82-32-621-1825 / Fax: ++82-32-621-1830 E-mail: gearbox@gear-box.com

技术参数如有更改,恕不另行通知!资料准确性截止到封面所示日期.要了解确切的安装尺寸,请另索安装图

Subject to technical change without notice. For installation investigation purposes, please request installation drawings: only the date contained therein is binding